

UNIVERSITY COLLEGE LONDON

DEPARTMENT OF ELECTRONIC AND ELECTRICAL ENGINEERING

Performance characterisation of 8-bit RISC and OISC architectures

<i>Author:</i>	<i>Supervisor:</i>	<i>Second Assessor:</i>
Mindaugas JARMOLOVIČIUS zceemja@ucl.ac.uk	Prof. Robert KILLEY r.killey@ucl.ac.uk	Dr. Ed ROMANS e.romans@ucl.ac.uk
SN: 17139494		

A BEng Project Final Report

April 20, 2020

Contents

1 Abstract	2	5.7.2 OISC Instruction decoding	16
2 Introduction	2	5.8 Assembly	16
2.1 Aims and Objectives	2	5.9 System setup	18
2.2 Related Work	2		
2.3 Project contents	3		
3 Goals and Objectives	4	6 Results and Analysis	19
3.1 RISC Processor	4	6.1 FPGA logic component composition	19
3.2 OISC Processor	4	6.2 Power analysis	20
3.3 Design Criteria	4	6.2.1 Activity Factor	21
3.4 Benchmark	4	6.3 Benchmark Programs	21
		6.3.1 Instruction composition	21
		6.3.2 Performance	23
		6.3.3 Program space	24
4 Theory and Analytical Bases	4	6.4 Maximum clock frequency	25
4.1 RISC Processor	4	6.5 Future work	25
4.1.1 Pipelining	5	7 Conclusion	26
4.1.2 Multiple cores	6		
4.2 OISC Processor	6	8 Appendix	29
4.2.1 OISC Pipelining	6	8.1 Processor instruction set tables	29
4.3 Predictions	7		
4.3.1 Execution time	7		
4.3.2 Instruction Space	7		
4.3.3 Resources	7		
5 Technical Method	8		
5.1 Machine Code	8		
5.1.1 RISC Machine Code	8		
5.1.2 OISC Machine Code	8		
5.2 Data flow	9		
5.2.1 RISC Datapath	9		
5.2.2 OISC Datapath	10		
5.2.3 OISC Datapath Implementation Problems	10		
5.3 Stack	10		
5.3.1 RISC Stack	11		
5.3.2 OISC Stack	11		
5.4 Program Counters	11		
5.4.1 RISC Program Counter	11		
5.4.2 OISC Program Counter	12		
5.5 Arithmetic Logic Unit	13		
5.5.1 OISC ALU	13		
5.5.2 RISC ALU	14		
5.6 Program Memory	14		
5.6.1 RISC Program Memory	14		
5.6.2 OISC Program Memory	15		
5.7 Instruction decoding	15		
5.7.1 RISC IMO	15		

1 Abstract

One Instruction Set Computer (OISC), commonly implemented as Transport Triggered Architectures (TTAs) is a promising architecture that is successfully used in Application-Specific Instruction Set Processors (ASIPs) exploiting operation style parallelism, while keeping simplicity and flexibility. There is a lack of research in general purpose OISC with single data-instruction bus that could be used in lower power and performance comparable to a 8bit microcontroller using traditional Reduce Instruction Set Computer (RISC) architecture. The paper designs two novel 8bit RISC and OISC processors, and investigates their characteristics and performance when implemented on FPGA. OISC required only a half of logic elements comparing to RISC, however it takes 71% longer to execute designed benchmark, showing that OISC would need more than one data-instruction bus to outperform RISC.

2 Introduction

Since the 70s there has been a rise of many processor architectures that try to fulfil specific performance and power application constraints. One of more noticeable cases are ARM RISC architecture being used in mobile devices instead of the more popular and robust x86 CISC (Complex Instruction Set Computer) architecture in favour of simplicity, cost and lower power consumption [1, 2]. It has been shown that in low power applications, such as IoTs (Internet of Things), OISC implementation can be superior in power and data throughput comparing to traditional RISC architectures [3, 4]. This project proposes to compare two novel RISC and OISC 8bit architectures and compare their performance, design complexity and efficiency.

2.1 Aims and Objectives

The project has three main objectives:

1. Design and build a RISC based processor.
2. Design and build an OISC based processor.
3. Design and perform a fair benchmark on both processors.

2.2 Related Work

This section goes through supporting theory of RISC and OISC architectures, and their comparison.

The principal functions of general OISC architecture should have advantage in performance and power consumption while having lower transistor count. There are several theoretical models to implement a processor using only a one instruction, most important models are subtract and branch, MOVE and half-adder architectures [5].

Some researches have proven benefits of the subtract and branch architecture over the RISC:

- Using an OISC **SUBLEQ** (SUBtract and jump if Less or EQuial to zero) as a coprocessor for the MIPS-ISA processor to emulate the functionality of different classes shows desirable area/performance/power trade-offs [4].
- Comparing an OISC **SUBLEQ** multicore to a RISC achieves better performance and lower energy for streaming data processing [3].

Looking at the OISC **MOVE** type, it has been researched since early 90s. It has been shown that the OISC **MOVE** can benefit of a VLIW (very large instruction word) arrangement, classifying it as a **SIMO** (single instruction, multiple operation) or a **SIMT** (single instruction, multiple transports) architectures. The problem with all of these arrangements is that they exhibit poor or complex hardware utilization. OISC **MOVE** has been proposed as a design framework

enabling a lower complexity, better hardware utilization, and a scalable performance [6]. In this framework a TTA is proposed which describes how a single instruction should transport the data. To support theoretical benefits, a MOVE32INT TTA has been designed [7] and proven to be superior architecture to the RISC. Using a $1.6\mu\text{m}$ fabrication technology, RISC has achieved 20MHz clock with 20Mops/second, while MOVE32INT implemented using SoGs (Sea of Gates) achieved 80MHz with 320Mops/second [8].

The TTA framework as further used in other researches to implement ASIPs to solve various problems. Some relevant examples are RSA calculation [9]; matrix inversion [10]; Fast Fourier Transform (FFT) [11]; IWEPE, RC4 and 3DES encryption [12]; Parallel Finite Impulse Response (FIR) filter [13]; Low-Density Parity-Check (LDPC) encoding [14]; Software Defined Radio (SDR) [15]. One of the most recent researches use TTA architecture to solve Compressive Sensing algorithms. Research showed 9 times of energy efficiency to that of FPGA implemented NIOS II processor, and theoretical 20 time energy efficiency that of ARM Cortex-A15 [16]. In this particular research however, used ARM Cortex-A15 with 28nm Metal Gate CMOS technology, compares to TTA implemented on Altera Cyclone IV FPGA with 60nm Silicon Gate CMOS technology. Both processor implementations cannot be directly compared.

Most of these researches show that TTA has a greater power efficiency, a higher clock frequency and a lower logic resource count.

These benefits come with an expense, VLIW has bigger instruction word, therefore a bigger program size. TTA especially suffers from this due to the redundant instructions. Some proposed solutions are variable length instructions and instruction templates, which reduced program size between 30% and 44% [17, 18]; a compression based on arithmetic coding [19];

and a method to remove redundant instructions [20]. Software is another difficulty as the compiler need to take additional steps for the data transportation optimisations. TTA software can be easily exploited however, to embed a software pipelining and parallelism without need of the extra hardware [21].

With the proposed MOVE framework, hardware utilisation shown to be improved by reducing transition activity [22], reducing interconnects shown saving 13% of energy [23] on a small scale. A novel architecture named SynZEN also showed a further improvements by using an adaptable processing unit and a simple control logic [24].

2.3 Project contents

Section 3 will go more in details behind the motivation and project decisions based on Related Work. Section 4 explains theory and result predictions. Section 5 explains both processor design choices and how each processor part is implemented on OISC and RISC processor. It also includes assembler design and system setup. In section 6, results will be discussed, including benchmark methods and future work. Summary and conclusion of design and results can be found in section 7. Appendix in section 8 includes any other information, such as both processor instruction set.

3 Goals and Objectives

This project can be classified as a Design and Construction type, which explores alternative designs of a processor architecture and microarchitecture. Main goals are:

1. Study and explore computer architectures, SystemVerilog and the assembly language.
2. Compare how well an OISC MOVE architecture would perform in a low

performance microcontroller application comparing to equivalent and most commonly used RISC architecture.

- View an alternative method of using OISC MOVE in a SISO (single instruction, single operation) structure, comparing to more commonly implemented TTAs VLIW architectures that are either a SIMO or a SIMT structure.

3.1 RISC Processor

The RISC architecture will be mainly based on MIPS architecture explained in [25], except it this RISC processor would have 8bit data bus, four general purpose registers and would have multiple optimisations related to 8bit limits. Some of minimalistic design ideas was also from [5].

3.2 OISC Processor

OISC MOVE has many benefits from VLIW and SIMO or SIMT design, however there is a lack of research investigating and comparing more general purpose OISC MOVE 8bit processor with a short instruction word and a SISO configuration. The main theory for building OISC architecture will be based on [5].

3.3 Design Criteria

In order to fairly comparison between both architectures, a common design criteria is set:

- Minimal instruction size
- Minimalistic design
- 8bit data bus width
- 16bit ROM address width
- 24bit RAM address width
- 16bit RAM word size

When constructing these points, time and equipment resources were taken into the consideration.

3.4 Benchmark

This benchmark includes different algorithms that are commonly used in 8bit microcontrollers, IoT devices or similar low power microprocessor applications.

4 Theory and Analytical Bases

In this section differences in RISC and OISC are explained. It includes predictions and theory behind it.

4.1 RISC Processor

In this project, proposed RISC is mainly based on MIPS microarchitecture [25]. Figure 4.1.1 represents a simplified diagram of a proposed RISC processor. In this architecture, program data travels from a program memory to the control block where instruction is decoded. Then, control block further decides how data is directed in the datapath block. Such structure requires a complicated control block and additional data routing blocks. Depending on instruction, control block sets ALU, register file, memory operations and how data flows from one to other. Therefore, if none of the blocks are bypassed, data can flow through every single of these blocks, creating a long chain of combinational logic and increasing the critical path. However, this enables great flexibility allowing multiple operations to happen during a single step, for example load value from register to memory, while address value is immediate offset by another register value using the ALU. In order to increase performance of such processor, pipelining or multiple cores may be used.

4.1.1 Pipelining

$$T_c = t_{pcq} + t_{ROM} + t_{register} + t_{routing} + t_{ALU} + t_{RAM} + t_{setup} \quad (1)$$

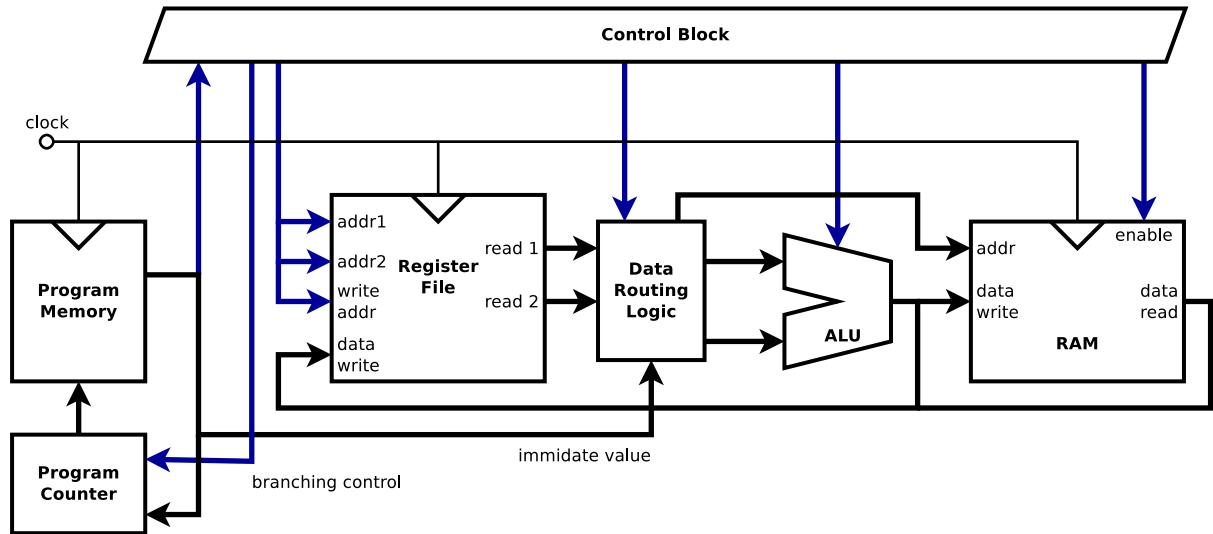


Figure 4.1.1: Abstract diagram of proposed RISC structure

Equation 1 shows the maximum processor cycle period T_c which depends on combinational logic delay of every logic block, flip-flop time of propagation from clock to output of synchronous sequential circuit t_{pcq} and flip-flop setup time t_{setup} .

$$T_{cp} = \max \left(\begin{array}{l} t_{pcq} + t_{ROM} + t_{setup}, \\ t_{pcq} + t_{register} + t_{setup}, \\ t_{pcq} + t_{ALU} + t_{setup}, \\ t_{pcq} + t_{RAM} + t_{setup} \end{array} \right) \quad (2)$$

Pipelining separates each processor's datapath block with a flip-flop. This changes critical path therefore reducing cycle period. A pipelined processor cycle period T_{cp} is represented in the equation 2. Such modification could theoretically increase clock frequency by 2 or 3 times.

Pipelining, however, introduces other design complications. Instructions that depend on each other, for example an operation $R = A + B + C$ needs to be executed in two steps, $t = A + B$ and $R = t + C$. Second step depends upon previous step result. Therefore, additional logic is required to detect such dependencies and bypass datapath stages, or stall pipelining. Furthermore, breaching would also require stalling; temporary saving datapath stage and restoring it if needed when branching is concluded;

or further branch prediction logic. Such dependency and branching issue requires a timing hazards prevention logic which increases processor complexity and required resources.

4.1.2 Multiple cores

A multicore system is a solution to increase processor throughput by having multiple datapaths and control logic instances, each running separate instructions. Cores share other system resources such as RAM.

A multicore processor requires software adjustments as each processor's core would execute separate programs. Therefore, some synchronisation between them is needed. A single additional core would also double the control and datapath blocks, substantially increasing resource requirements too. In addition, programs most often cannot be perfectly divided to parallel tasks due to some result dependencies between each subtask. Therefore, doubling processor core count would not likely result double the performance.

4.2 OISC Processor

Figure 4.2.1 represents simplified structure of an OISC MOVE architecture. In the simplest case, processor has a pair of buses

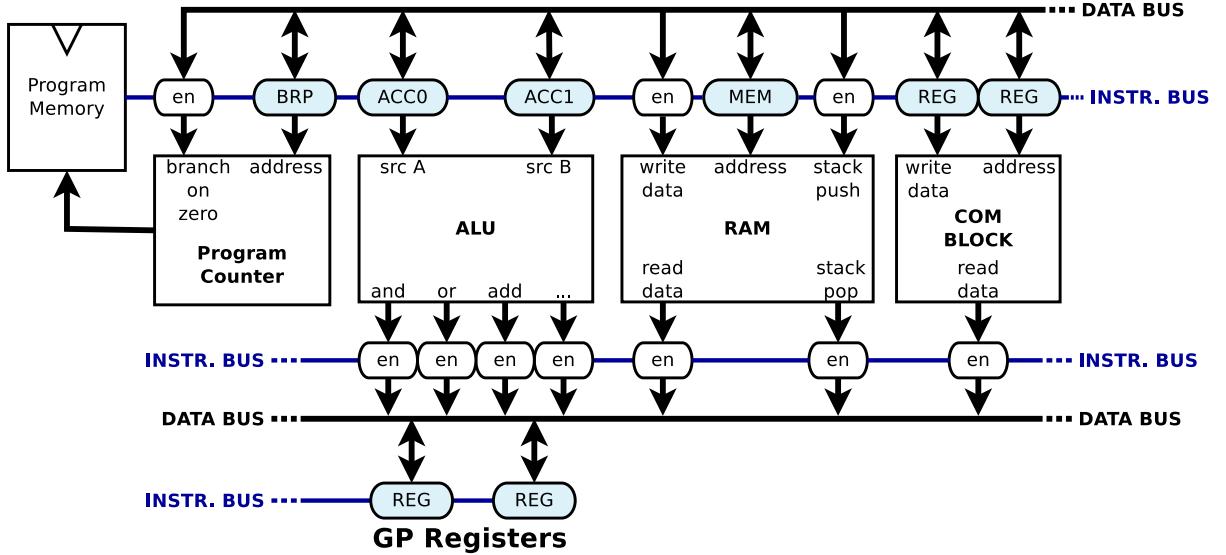


Figure 4.2.1: Abstract diagram of proposed OISC structure

data and instruction. An instruction bus has a source and destination address that connects two parts of processor via a data bus. This mechanism allows for the data to flow around processor. Computation is accomplished by setting accumulators at destination addresses and taking computed values from the source address. Other actions can be performed by destination node, for instance check value for branching or sending data to memory.

4.2.1 OISC Pipelining

The maximum cycle period of such processor microarchitecture can be found in Equation 3.

$$t_{CL} = \max \left(t_{register}, t_{ALU}, t_{RAM} \right) \quad (3)$$

$$T_{cp} = \max \left(\frac{t_{en} + t_{buf}}{t_{pcq1}}, \frac{t_{en} + t_{buf}}{t_{pcq2}} \right) + t_{pcq2} + t_{CL} + t_{setup}$$

Where t_{en} is period to check if instruction bus address match, t_{buf} is period for source buffer to output value into the data bus, t_{pcq2} is propagation period for program

memory, t_{CL} represents the longest propagation period though a logic block, t_{setup} is the setup time inside logic block. t_{pcq1} and t_{pcq2} are clock to output delay for the sequential logic connecting source buffer and memory connecting instruction bus, respectively.

4.3 Predictions

Comparing RISC and OISC, the maximum processor cycle period of OISC is almost equivalent to the pipelined RISC, with addition of enable, buffer and additional ROM delays: $\max(t_{en} + t_{buf}, t_{pcq1})$.

Further more, due to the nature of processor no additional timing hazard prevention logic is needed, making this much simpler design. OISC t_{CL} pipelining can be also introduced to components that has high propagation delay. For instance, multiplication in an ALU could be pipelined into two stages. When setting ALU accumulators, software could be designed to retrieve multiplied result only after two cycles. This can further reduced required resources.

4.3.1 Execution time

OISC requires taking extra steps to perform basic functions. ALU, branch or memory

operations needs accumulator values to be set first to compute an output. A single data-instruction bus OISC therefore is expected to be slower executing the same task as RISC.

4.3.2 Instruction Space

RISC has compact instructions, as a single instruction can carry a small opcode, register addresses and optionally a multiple word immediate value. OISC has a bigger instruction overhead as it can only carry a source and destination address, meaning it can operate on only one register or immediate value in a single instruction. Therefore, it is expected the OISC will require more instruction space to perform the same function as RISC.

4.3.3 Resources

OISC does not have a control block which contains how data travel in datapath. It also does not have multi-address register file and further routing logic within a datapath. This indicates that the OISC should require less logic elements to implement. This also should result in lower power consumption.

5 Technical Method

This section describes methods and design choices used to construct two processors.

5.1 Machine Code

5.1.1 RISC Machine Code

As the aim of instruction size to be as minimal as possible, RISC instruction decided to be 8bits with optional additional immediate value from 1 to 3 bytes. Immediate values are explained in section 5.7.

Decision was made to have instruction composed of operation code two operands - source/destination and source, which is similar to x86 architecture rather than MIPS. Three possible combinations of register address sizes are possible in such case from one to three bits. Two was selected as it allows having four general purpose registers which is sufficient for most applications, and allows four bits for operation code - allowing up to 16 instructions.

Due to small amount of possible operation codes and not all instructions requiring two operands (for example **JUMP** instruction may not need any operands or could use one operand to have address offset), other two type instructions are added to the design - with one and zero operands. See figure 5.1.1. This enabled processor to have 45 different instructions while maintaining minimal instruction size. Final design has:

- **8** 2-operand instructions
- **32** 1-operand instructions
- **5** 0-operand instructions

Full list of RISC instructions are listed in table 8.1.1 in Appendix section.

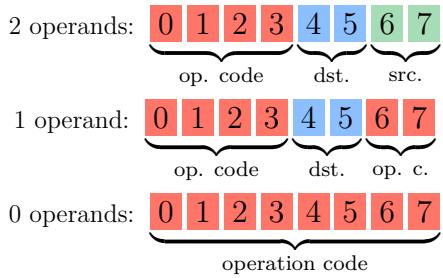


Figure 5.1.1: RISC instructions composition. Number inside box represents bit index. Destination (dst.) bits represents of source and destination register address.

5.1.2 OISC Machine Code

As OISC requires only a single instruction, composition of instruction mainly requires two parts - source and destination. To allow higher instruction flexibility a immediate bit has been added to replace source address by immediate value. Composition of finalised machine code is shown in figure 5.1.2.




Figure 5.1.2: OISC instruction composition. Number inside box represents bit index.

Decision was made to have source address to be eight bits to allow it be replaced with immediate value. Destination address was chosen to be as minimal as possible, leaving only four bits or 16 possible destinations. Final design has **15** destination and **41** source addresses. This is not the most space efficient design as 41 source addresses would require only six bits for address, wasting two bits every time non-immediate source is used.

Full list of OISC sources and destinations are listed in table 8.1.2 in Appendix section.

5.2 Data flow

5.2.1 RISC Datapath

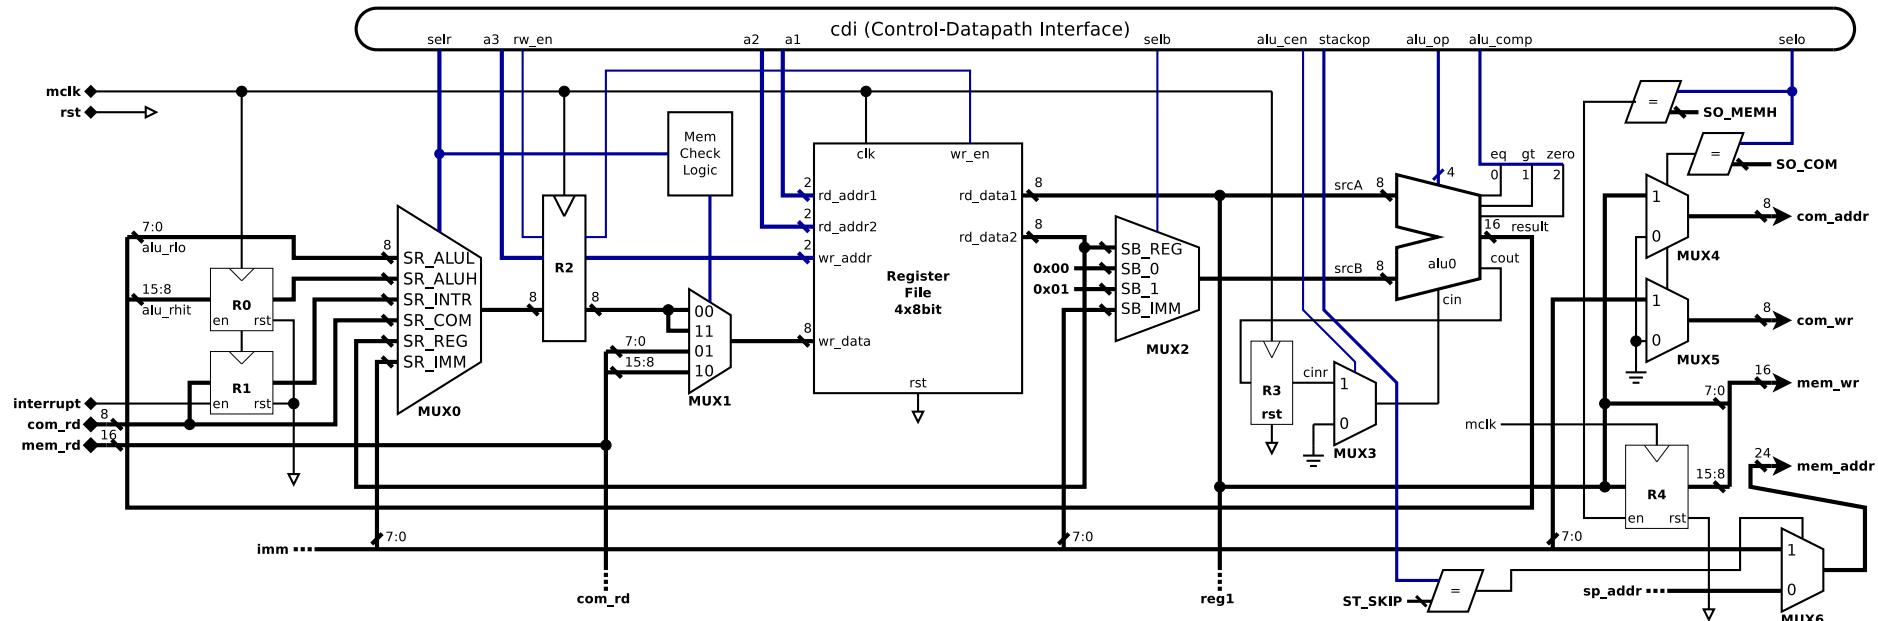


Figure 5.2.1: Digital diagram of RISC datapath

Figure 5.2.1 above represents partial RISC datapath. This diagram can be extended to Program counter, Stack pointer and Immediate. Override logic are represented in figures 5.4.1, 5.3.1 and 5.7.1 respectively. CDI (Control-Data Interface) is HDL concept that connects datapath and control unit. Immediate value to datapath is provided by IMO block described in section 5.7.1.

Data to register file is selected and saved with **MUX0**. This data is delayed 1 cycle with **R2** to match timing that of data is taken from memory. If LWLO or LWHI is executed, **MUX1** select high or low byte from memory to read. To compensate for timing as value written to register file is delayed by 1 cycle, register file has internal logic that outputs **wr_data** to **rd_data1** or/and **rd_data2** immediately if **wr_en** is high and **rd_addr1** or/and **rd_addr2** matches **wr_addr**.

MUX2 allows override ALU source B, *R3* and *MUX3* enables control unit to enable ALU carry in allowing multi-byte number addition/subtraction. This function is not fully implemented yet. *MUX4* and *MUX5* allows to send data to COM block with COM instruction, if other instruction performed then *0x00* byte for COM address and data is sent, indicating no action. Data is stored in memory only with *SWL0* instruction writing to high byte whatever is stored in *R4* buffer. This buffer can be written to using *SWHI* instruction. *MUX6* selects memory address value from *imm* or stack pointer.

5.2.2 OISC Datapath

OISC datapath only consists of instruction and data buses, and small circuit that connect them to logic blocks that process the data. These logic blocks can represent ALU operation combinational logic, or any other part of a processor.

Figure 5.2.2 represents common destination circuit. It checks if particular block destination matches one on instruction bus, then enables latch and also sets flag to further logic.

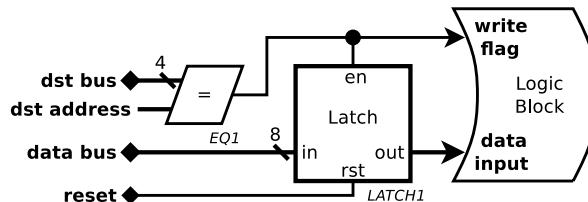


Figure 5.2.2: OISC processor data bus to destination connection logic

Similarly Figure 5.2.3 represents source circuit connecting output of logic block. As logic block may only involve combinational logic a register is placed at the output of it. Buffer is used to connect data in register to data bus. This ensures that only one bus driver is present, ensuring no data collision.

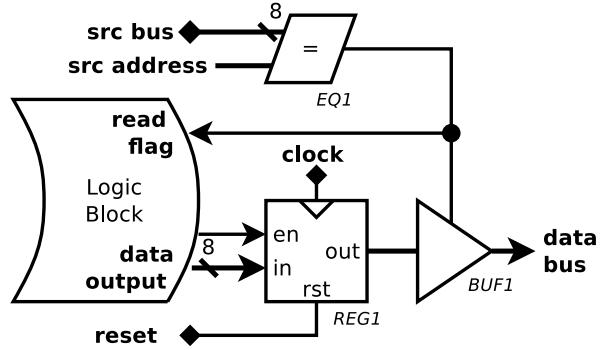


Figure 5.2.3: OISC processor data bus to source connection logic

The general timing is designed so that the information at the source is immediately ready in data bus at rise of the processor clock. The source is connected to the destination connection where combinational logic is present.

5.2.3 OISC Datapath Implementation Problems

The complete implementation using latches for destination was not successful. Latches did not operate correctly when synthesised on FPGA. This issue might be caused by some timing problem between some source and destination logic combination. Exact cause was not resolved.

As a quick solution, latches at destination has been replaced with a clocked register that is triggered at opposite to source register clock edge (negative). This resolved this issue, however it effectively reduce period that data can propagate through logic blocks between source and destination by two.

5.3 Stack

This section describes RISC and OISC dedicated logic for stack pointer control. Stack pointer starts from the highest memory address value and "stacks" to lower memory address values. Both designs were simplified to only operate on two byte addresses, meaning that stack pointer has a constant *0xFF* value at least significant byte.

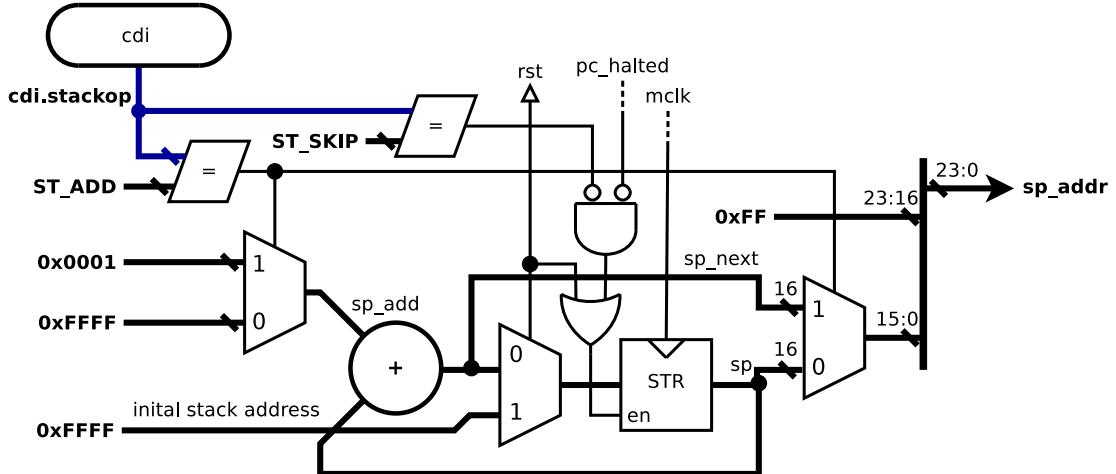


Figure 5.3.1: Digital diagram of RISC stack pointer logic

5.3.1 RISC Stack

RISC processor implements the stack pointer that is used in **PUSH**, **POP**, **CALL** and **RET** instructions. The stack pointer's initial address starts at the highest memory address (0xFFFF) and subtracts 1 when data is put to stack. Figure 5.3.1 represents the logic diagram for stack pointer. Note that the stack is only 16bit in size and the most significant byte is set to 0xFF. The stack pointer circuit also supports **pc_halted** signal from program counter to prevent the stack pointer from being added by 1 twice during **RET** instruction.

One of the problems with the current stack pointer implementation is 8bit data stored in 16bit memory address, wasting a byte. This can be avoided by adding a high byte register, however then it would cause problems when a 16bit program pointer is stored with **CALL** instruction. This can still be improved with a more complex circuit, or by using memory cache with 8bit data input. However with current implementation this does not affect processor comparison, it only increases stack size in memory.

5.3.2 OISC Stack

Stack pointer in OISC is very similar to RISC. In basic operation, when reset, push or pop flags are set, it changes the state

of stack pointer by adding or subtracting its value by one, or resetting it to default. Logic diagram is shown in Figure 5.3.2

Logic diagram of stack control unique to OISC processor is shown in Figure 5.3.3. Push and pop flags are taken from source and destination logic. A cached value of last stored value is kept, so that it would be immediately available on source request. Pop flag is delayed by one cycle which ensures that once popped, lower stack value is written to cache during next cycle.

5.4 Program Counters

In this subsection, program counter and their differences will be described.

5.4.1 RISC Program Counter

Figure 5.4.1 represents the digital diagram for program counter. There are a few key features about this design: it can take values from memory for **RET** instruction; immediate value (**PC_IMM2**) is shifted by 1 byte to allow **BEQ**, **BGT**, **BGE** instructions as first immediate byte used as ALU source B); can jump to interrupt address; produces **pc_halted** signal when memory is read (**RET** instruction takes 2 cycles, because cycle one fetches the address from stack and second cycle fetches the instruction from the instruction memory).

5.4.2 OISC Program Counter

OISC program counter is much simpler than RISC, as it does not have variable length instruction, delay flags instructions, or logic for selecting branch source address.

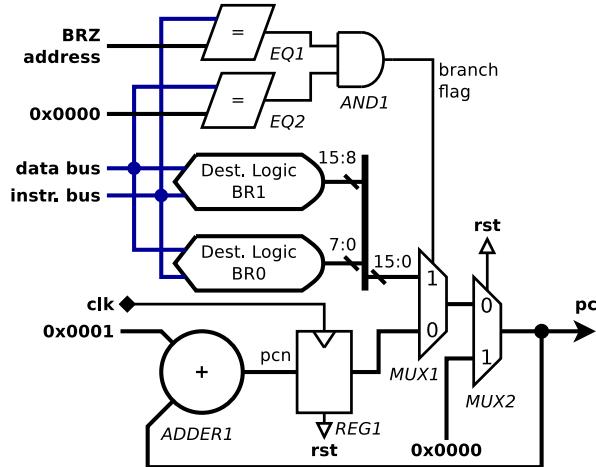


Figure 5.4.2: Digital diagram of OISC program counter

Looking at Figure 5.4.2 bottom, the basic operation is to just add one to previous program counter with *ADDER1* and

REG1, reset it to zero at reset with *MUX2*. Two destination logic blocks are used as accumulators to store branch address. Once instruction with *BRZ* destination is executed, *EQ2* check if data bus value is zero, which enables *MUX1* and overrides program counter to address stored in *BR0* and *BR1* accumulators. Unlike in RISC however, it requires three instructions to set new address and jump. Similarly, *CALL* and *RET* requires five and three instructions respectively. These RISC equivalent instructions are show in Listing 1.

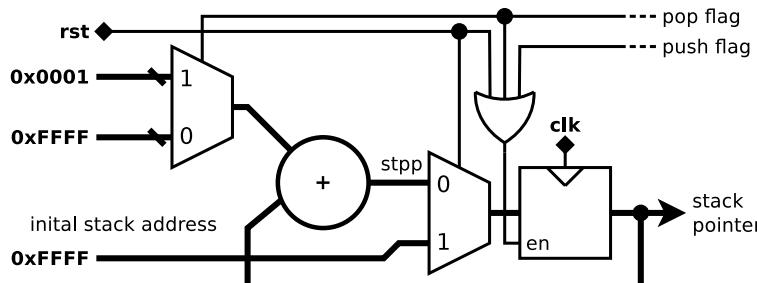


Figure 5.3.2: Digital diagram of OISC stack pointer logic

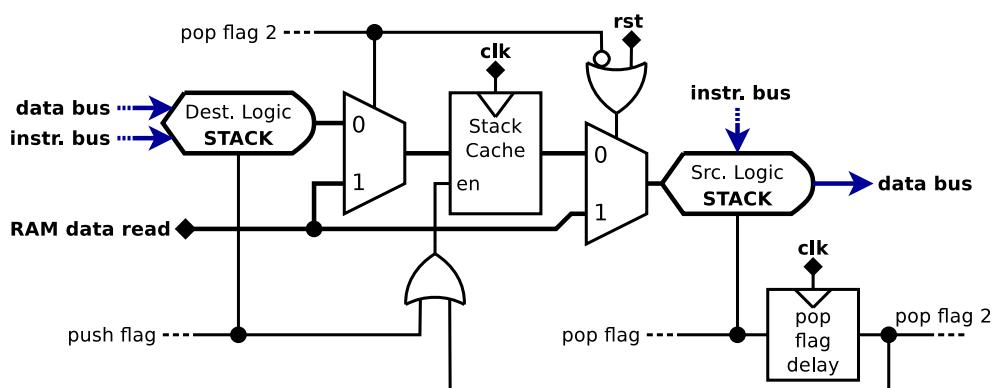


Figure 5.3.3: Digital diagram of OISC stack control logic

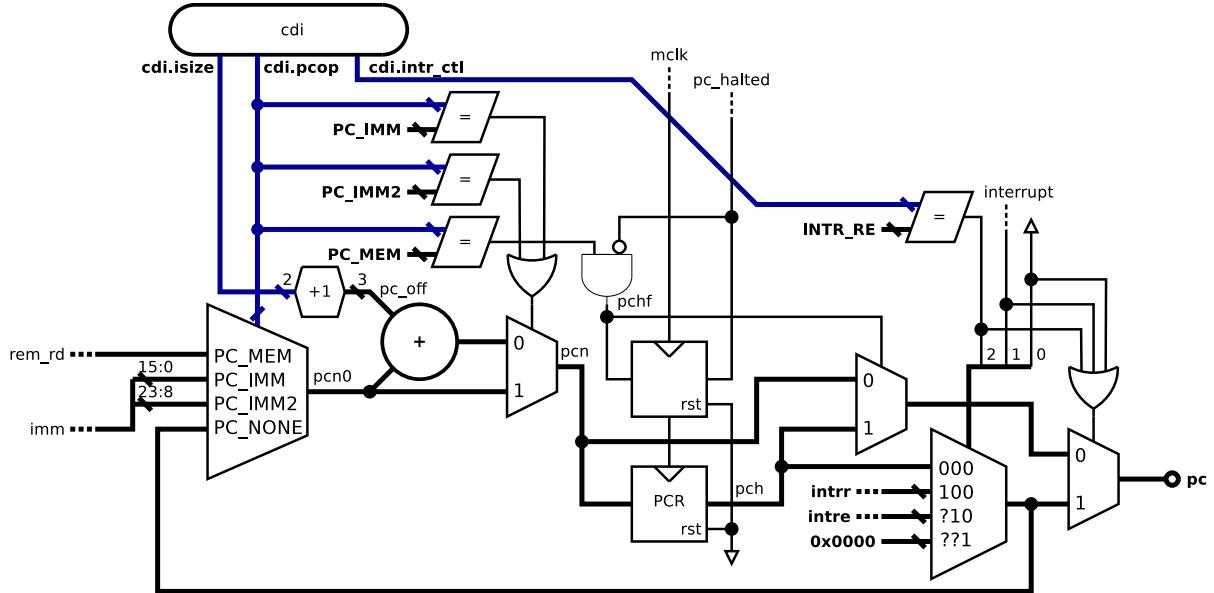


Figure 5.4.1: Digital diagram of RISC program counter

Listing 1: OISC assembly code emulating RISC JUMP, CALL and RET instructions.

```
%macro JUMP 1
    BR1 %1 @1
    BRO %1 @0
    BRZ 0x00
%endmacro

%macro CALL 1
    BR1 %1 @1
    BRO %1 @0
    STACK %%return @1
    STACK %%return @0
    BRZ 0x00
    %%return:
%endmacro

%macro RET 0
    BRO STACK
    BR1 STACK
    BRZ 0x00
%endmacro
```

scribed in table 5.5.1.

Name	Description
ADD	Arithmetic addition (inc. carry)
SUB	Arithmetic subtraction (inc. carry)
AND	Bitwise AND
OR	Bitwise OR
XOR	Bitwise XOR
SLL	Shift left logical
SRL	Shift right logical
ROL	Shifted carry from previous SLL
ROR	Shifted carry from previous SRL
MUL	Arithmetic multiplication
DIV	Arithmetic division
MOD	Arithmetic modulo

Table 5.5.1: Supported ALU commands for both processors

5.5.1 OISC ALU

Due to the structure of OISC processor, ALU source A and B are two latches that are written into when ALU0 or ALU1 destination address is present. ALU sources are connected with every ALU operator and performed in single clock cycle. This value is stored in register so that it would immediately available in a next clock cycle as a source data. Figure 5.5.1 represents logic

5.5 Arithmetic Logic Unit

This section will discuss ALU implementations of both processors. For fair comparison between OISC and RISC, ALU in both system will have the same capabilities de-

diagram of ALU with only addition and multiplication operators present. Note that output of $EQ3$ is connected to enable of $REG3$, enabling output of carry to be only read after ADD source is requested. This previous source memory is also used for SUB, ROL and ROR operations. This allows processor to perform other operations such as store or load values, before accessing carry bit, or carried byte for ROL and ROR operations.

5.5.2 RISC ALU

RISC processor has very similar structure to OISC with two exceptions. Inputs to ALU comes from logic router that decided how to route data in datapath. Output buffers are replaced by one multiplexer that selects single output from all ALU operations. Another point is that RISC ALU output is 16bit, higher byte saved in "ALU high byte register" for MUL, MOD, ROL and ROR operations. This register is accessible with GETAH instruction.

5.6 Program Memory

This section describes how instruction memory (ROM) is implemented for both processors.

5.6.1 RISC Program Memory

In order to allow dynamic instruction size from one to four bytes a special memory arrangement is made. A system was required to access word (8bits) from memory and next three words. To achieve this four ROM blocks been utilised, each containing one fourth of sliced original data. Input address is offset by adders $ADDER1-3$ and further divided by four by removing two least significant bits at **addr0-3**. Before concatenating output of each ROM block into final four bytes, ROM outputs **q0-3** are rearranged depending on **ar** signal. Note that $MUX1-4$ each input is different, this may be better visualised with Verilog code in listing 2.

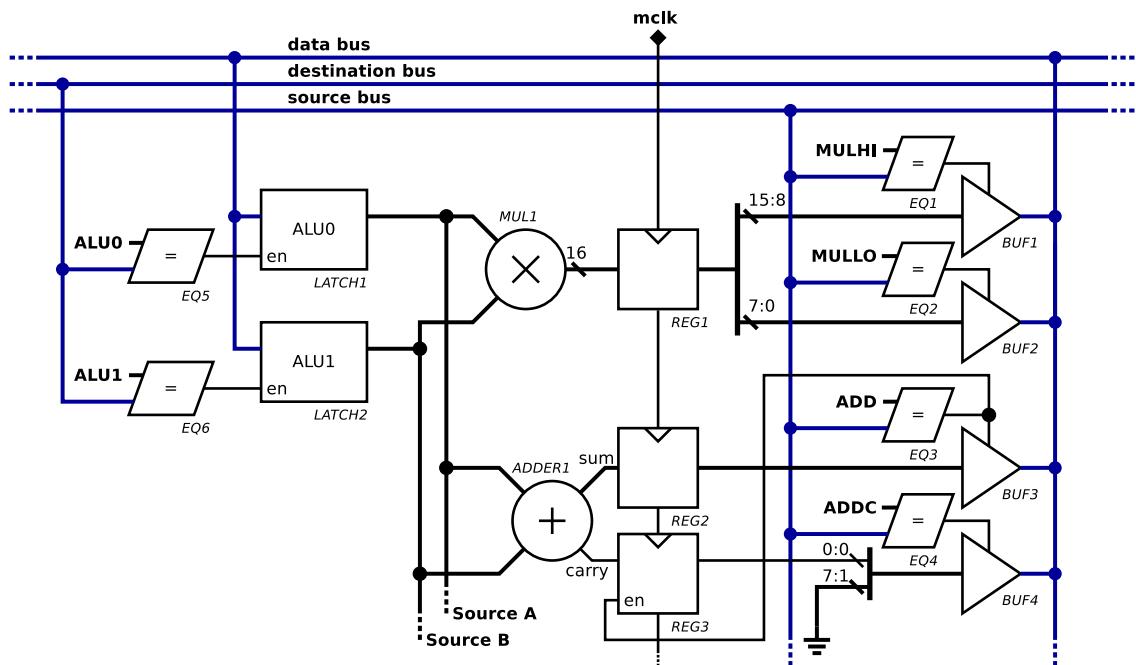


Figure 5.5.1: Digital diagram of OISC partial ALU logic

Listing 2: RISC sliced ROM memory multiplexer arrangement Verilog code

```

case (ar)
  2'b00: data={q3,q2,q1,q0};
  2'b01: data={q0,q3,q2,q1};
  2'b10: data={q1,q0,q3,q2};
  2'b11: data={q2,q1,q0,q3};
endcase

```

5.6.2 OISC Program Memory

OISC instructions are fixed 13 bits, which causes different problems to RISC sliced memory - non-standard memory word size. To implement ROM in FPGA, Altera Cyclone IV M9K memory configurable blocks were used. Each blocks as 9kB of memory each allowing 1024x9bit configuration. Combining three of such blocks together yields 27bits if readable data in single clock cycle. To store instruction code to such configuration, pairs of instruction machine code sliced into three parts plus one bit for parity check, see figure 5.6.2. Circuit extracting each instruction is fairly simple, shown in figure 5.6.3.

5.7 Instruction decoding

This section describes RISC and OISC differences between instruction decoding and immediate value handling.

5.7.1 RISC IMO

Already described in previous section 5.6, instruction from memory comes as 4 bytes. Least significant byte is sent to control block, other three bytes are sent to immediate override block (IMO) shown in figure 5.7.1. These three bytes are labelled as **immr**.

IMO block is a solution to change immediate value which enabled dynamically calculated memory pointers, branches dependent on register value or any other function that needs instruction immediate value been replaced by calculated register value. IMO is controlled by control block and **cdi.imoctl** signal, which is changed by **CI0**, **CI1** and **CI2** instructions. When signal is 0h, this block is transparent connecting **immr** directly to **imm**. When any of **CI** instructions executed, one of IMO register is overridden by **reg1** value from register file. In order to override two or three bytes of immediate, **CI** instructions need to be executed in order. Only for one next instruction after last **CI** will have immediate bytes changed depending on what are values in **IMO** registers.

This circuit has two disadvantages:

1. Overriding immediate bytes takes one or more clock cycles,
2. At override, **immr** bytes are ignored

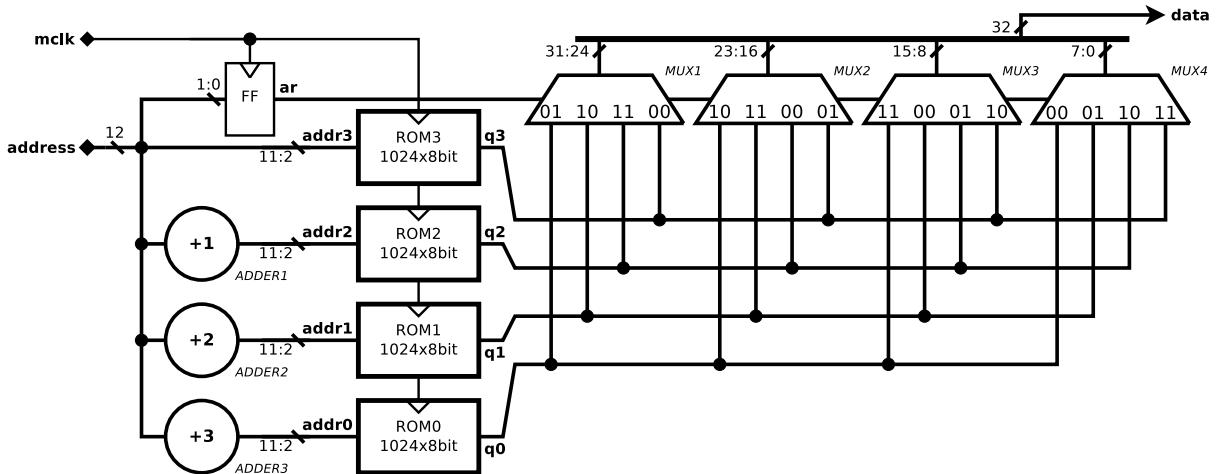


Figure 5.6.1: Digital diagram of RISC sliced ROM memory logic

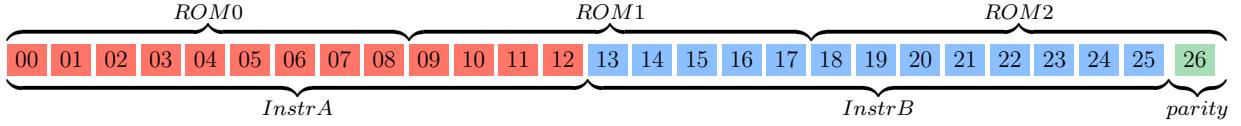


Figure 5.6.2: OISC three memory words composition. Number inside box represents bit index.

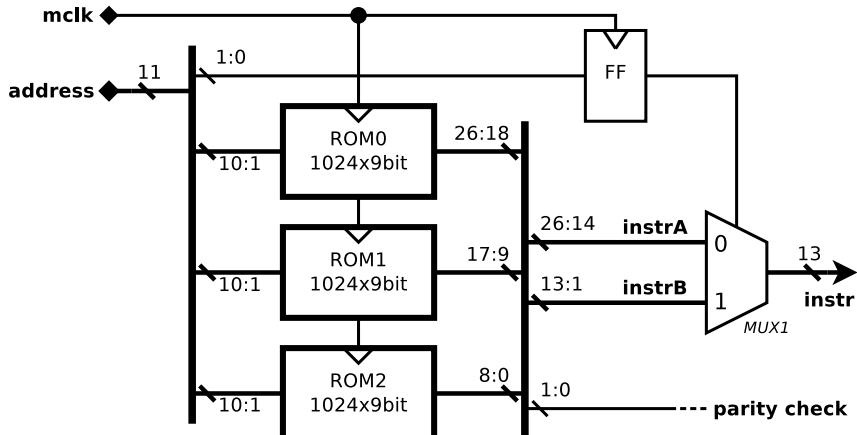


Figure 5.6.3: Digital diagram of OISC instruction ROM logic

therefore they are wasting instruction memory space.

Second point can be resolved by designing a circuit that would subtract the amount of overridden IMO bytes from *pc_off* signal (program counter offset that is dependant on *i*-size value) at the program counter, thus effectively saving instruction memory space. This solution however would introduce a complication with the assembler as additional checks would need to be done during compiling to check if IMO instruction are used.

5.7.2 OISC Instruction decoding

OISC immediate value is set in instruction decoder shown in figure 5.7.2. Decoder operation is simple - instruction machine code is split into three parts as described in 5.1.2. If instruction source address is 00h, connect data bus with constant 0 via *MUX2*. If immediate bit is 1, set source address to 00h (to make sure no other buffer source

connects to data bus), and connect instruction source address (immediate value) to databus via *MUX2* and *BUF1*.

5.8 Assembly

There are two steps between assembly code and its execution on a processor. First it needs to be converted to binary machine code. Secondly, binary data needs to be sliced to different parts described in section 5.6. These slices also need to be converted into appropriate formats, as simulation, HDL synthesis and flashing memory directly to FPGA memory, all use different formats.

A universal assembler was implemented with python for both processors. Flowchart in figure 5.8.1 represents general structure of assembler process. It splits assembly file into three parts - sections, definitions and macros. Definitions are keywords mapped to values which are saved in global label dictionary. Macros are a chunk of assembly code and is used as templates.

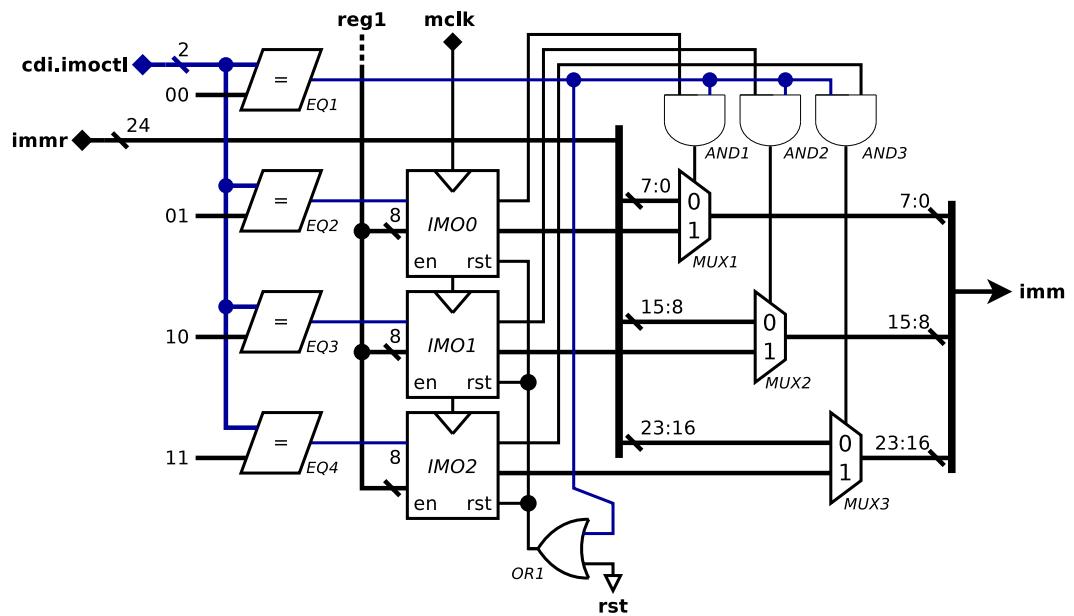


Figure 5.7.1: Digital diagram of RISC immediate override system

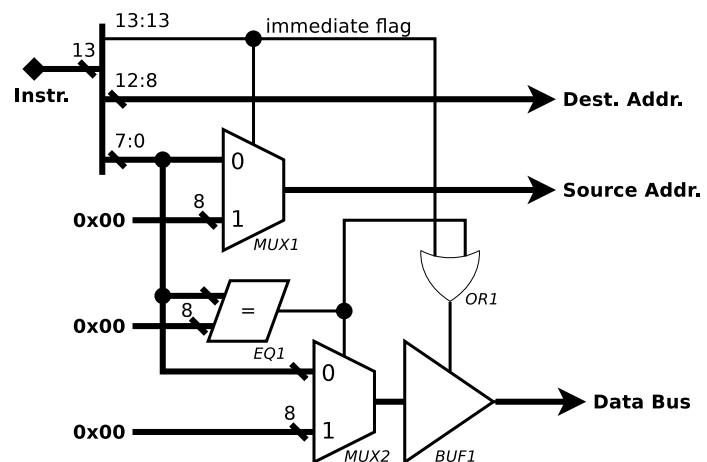


Figure 5.7.2: Digital diagram of OISC instruction decoder

There are only two sections implemented in assembler - `.text` and `.data`. Section `.text` contains all machine instructions which will be stored in program ROM memory. Section `.data` is used for global and static data, and it will be written into RAM memory. This section contains values such as strings and structures uninitialised data as labels which data is RAM memory location.

Section `.text` is processed line by line. Each has label, instruction name and instruction arguments. Label however is optional, if line contains it, label is saved to global label dictionary with program address. If line instruction name is a macro, line is replaced by macro and instruction arguments are used as macro arguments. Otherwise instruction name is decoded and stored in instruction list with original arguments.

After all instruction lines are completed, each stored instruction arguments are processed, labels are replaced with binary values, any other processing is done such as addition by constant, byte selection, etc. Completed list is then saved as raw binary. Similarly, `.data` section labels also replaced and it is saved as binary data.

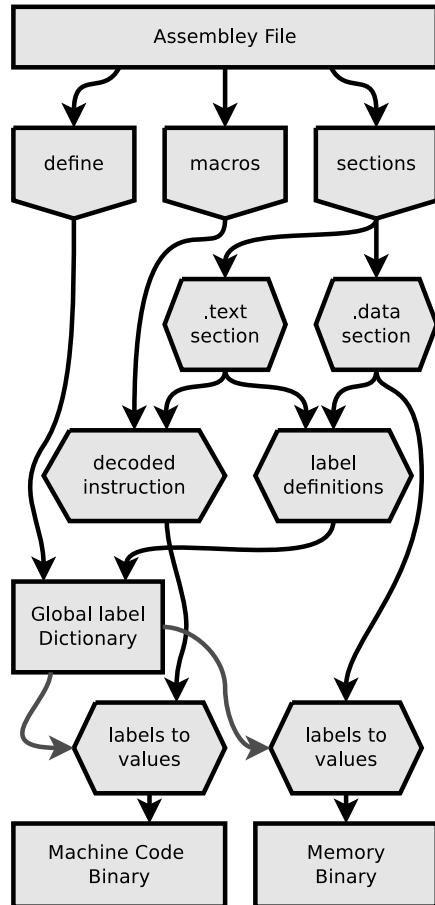


Figure 5.8.1: Flow chart of assembler converting assembly code into machine code and memory binary.

5.9 System setup

This section will describe how system is setup.

Processors are implemented on Terasic DE0-Nano board that use Altera Cyclone IV, EP4CE22P17C6 FPGA, which is manufactured using 60nm fabrication technology. FPGA has embedded memory structure consisting of columns of M9K memory blocks mentioned in Subsection 5.6.2. These memory structures were used to implement processors RAM and ROM memories. Board also has 32MB SDRAM chip, which initially was intended to be used. This set design criteria to have 24bit address space. However, M9K memory was used instead for simplicity.

FPGA has embedded phase-locked loop (PLL) structure that is used to change

50MHz input that is generated by on-board crystal to other frequencies.

DE0-Nano board as integrated JTAG port that is used to upload synthesised code and additional debugging tools. Quartus has "Signal Tap Logic Analyzer" tools that allow setup probes and sources within FPGA logic and control them via JTAG. "In-System Memory Content Editor" tool allows read and modify M9K memory which enabled quick machine code uploading to FPGA without need to resynthesise HDL code. This also allow reading RAM content to debug program.

All Quartus functions can be implemented via TCL script. This allowed constructing Makefile to allow quick build functions. Quartus signal and memory tool functions were used to write a small program with Python and Curses library to read and change internal processor state which allowed easy debugging while writing programs.

6 Results and Analysis

6.1 FPGA logic component composition

This subsection looks at test and its results to find how much FPGA logic components each processor takes and what is composition of each part.

Test was performed with Quartus synthesis tool and viewing flow summary report. This report includes synthesised design metrics including total logic elements, registers, memory bits and other FPGA resources. Test will only look at logic elements and registers. Total number of logic elements was found out by synthesising full processors, then commenting relevant parts of code, re-synthesising and viewing changes in total logic elements. Such method may not be the most accurate, because during HDL synthesis circuit is optimised an unused connections removed. This

means that more logic may be not synthesised than intended.

There are four parts of each processor that will be tested:

1. **Common** - processor auxiliary logic that is used by both processors. It includes communication block with UART, RAM and PLL (Phase-Locked Loop, for master clock generation).
2. **ALU** - as described in section 5.5, both processors have slightly different implementation of ALU.
3. **Memory** - processors memory management, including stack.
4. **Other** - reminding logic of processor that was not analysed.

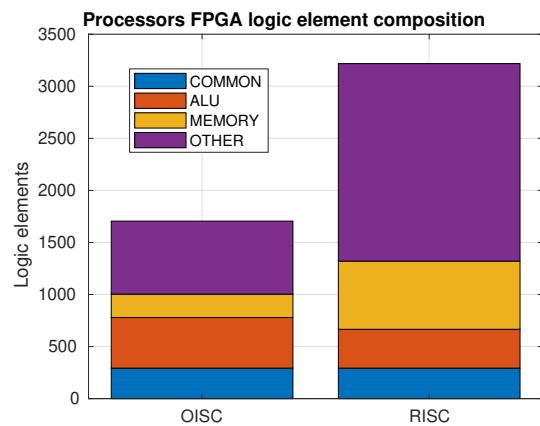


Figure 6.1.1: Bar graph of FPGA logic components taken by each processor.

Results of a test are shown in figures 6.1.1 and 6.1.2. Common logic uses 293 logic elements and 170 registers. OISC uses 1705 logic elements, while RISC uses 3218. Excluding common logic, OISC takes 48.3% of RISC's logic elements.

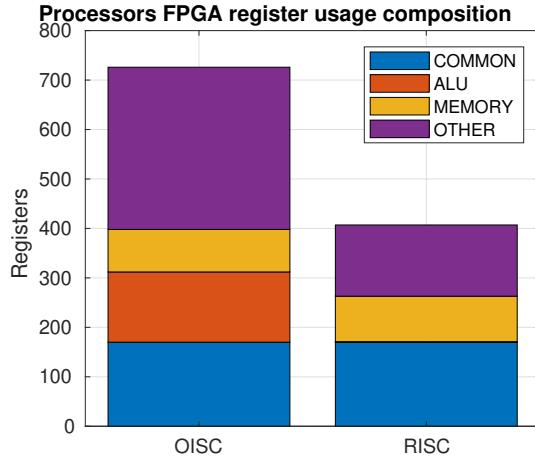


Figure 6.1.2: Bar graph of FPGA register resources taken by each processor.

OISC uses 726 logic elements, while RISC uses 407. Excluding common logic, OISC uses 78.4% more registers than RISC.

Looking at composition, OISC ALU takes 30.2% more logic gates. Looking at figure 6.1.2, high number of OISC ALU registers can be observed which concludes, that higher resource usage is OISC ALU code include buffer logic.

Memory logic elements composition of OISC is only 34.4% of RISC's and 7% lower for register resources, comparing to RISC. This indicate that by removing memory logic for RISC, synthesis tool may removed also other parts of processor, possibly part of control block because it mostly contains combinational logic.

Other logic includes instruction decoding with ROM, register file, program counter. RISC exclusively has control block. Note that OISC uses only three ROM memory blocks whereas RISC uses four as explained in section 5.6, however this should make a minimal difference as M9K memory blocks are not included in FPGA logic element or register count. Comparing both processors, OISC has only 37% of other logic components to RISC, however it has 2.28 times more registers. This shows a logic component - register trade-off. OISC buffer and common registers logic that connects bus require many more registers whereas RISC uses combination logic in control block in

order to control same data in datapath.

Much higher logic components in RISC can be also explained more complicated register file, ROM memory logic and program counter. All of these components has some additional logic for timing correction or additional functionality required by these blocks integration into datapath.

6.2 Power analysis

Power analysis was performed to analyse power consumption of both processors. This has been accomplished by connecting FPGA board to a laboratory power supply with 4V to an external power input. A shunt resistor of was used of 1.020Ω was connected in series to calculate current. Supply voltage and voltage across shunt resistor were measured using oscilloscope with data sampling feature. Three tests have been performed with different processor configurations. Between each tests a period of about 5 minutes was given for FPGA to reach steady state.

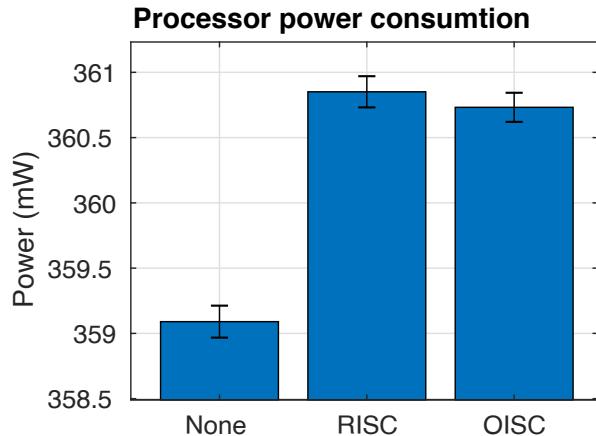


Figure 6.2.1: Measured power of processors when implemented on FPGA, running 16bit multiplication function in loop. None indicates auxiliary-only power.

First configuration is "None" or auxiliary-only power, which includes whole FPGA board, voltage regulators, and synthesised logic on FPGA required to support a processor (such as PLL, UART, Input/Output control, RAM). RISC and OISC indicate both processor implementations on FPGA,

each running multiplication program in a loop. Figure 6.2.1 represents power results. RISC and OISC bars in the graph indicate auxiliary power plus processor power, which means that the processor itself takes relatively small amount comparing to auxiliary power, about 0.5%. Result shows that OISC require 0.4%, which including noise is almost insignificant result.

During this test clock frequency of 1MHz was used. Due to equipment unavailability, further tests were not carried out to investigate power consumption at different frequencies. Due to constant noise, running at higher frequency may result in significant difference between processors.

6.2.1 Activity Factor

An activity factor could be also found using Equation 4 where P is power, C_{total} indicate total gate capacitance and V_{DD} indicate voltage supplied to the transistors.

$$\alpha = \frac{P}{C_{total} \cdot f \cdot V_{DD}^2} \quad (4)$$

As C_{total} and V_{DD} are constants, measuring power at different frequencies allows finding activity factor. This value could be used to compare how much of a processor circuit is active. Further design improvements could be used to optimise power [11, 15, 22, 23].

6.3 Benchmark Programs

A number of programs have been written to test both processors. These involve simple functions that could be commonly used in 8bit processors:

- **Printing:** Sends data to UART. It includes waiting until UART is available for transmission.
- **Printing unsinged integer:** Uses binary-coded decimal algorithm to convert 8 or 16bit binary value to decimal value and print it.

- **16bit multiplication:** Uses simple matrix multiplication.
- **16bit division:** Uses Long division algorithm to divide two 16bit numbers, result including a reminder.
- **16bit modulo:** Uses "Russian Peasant Multiplication" algorithm to perform Modulo operation with two 16bit numbers.
- **Prime number calculator:** Uses Sieve of Atkins algorithm [26] to calculate primer number, operates on 16bit numbers and utilise 16bit multiplication and modulo functions.

6.3.1 Instruction composition

This test is performed to investigate instruction composition of each function to see how similar it is between RISC and OISC processors.

- **MOVE** - All instructions that move data around internal processor registers.
- **ALU** - Instructions that are used to perform ALU operation.
- **MEMORY** - Instructions that are required to send/retrieve data from system memory, except stack.
- **STACK** - Instructions that push/pop data from memory stack.
- **COM** - Instruction(s) that send/receive data from communication block.
- **BRANCH** - Instructions that are used to make program branching.
- **OTHER** - Any other instructions.

Name	Instructions
MOVE	MOVE, CPY0, CPY1, CPY2, CPY3, CIO, CI1, CI2
ALU	ADD, ADDI, SUB, SUBI, AND, ANDI, OR, ORI, XOR, XORI, DIV, MUL, ADDC, SUBC, INC, DEC, SLL, SRL, SRA, GETAH
MEMORY	LWLO, LWHI, SWLO, SWHI
STACK	PUSH, POP
COM	COM
BRANCH	BEQ, BGT, BGE, BZ, JUMP, CALL, RET

Table 6.3.1: RISC processor instruction groups used in instruction composition test.

Name	Destination
MOVE	REG0, REG1
ALU	ALU0, ALU1
MEMORY	MEM0, MEM1, MEM2, MEMLO, MEMHI
STACK	STACK
COM	COMA, COMD
BRANCH	BR0, BR1, BRZ

Table 6.3.2: OISC processor instruction destination groups used in instruction composition test

Name	Instructions
MOVE	ALU0, ALU1, REG0, REG1, PC0, PC1, NULL, IMMEDIATE
ALU	ADD, ADDC, SUB, SUBC, AND, OR, XOR, SLL, SRL, EQ, GT, GE, NE, LT, LE, MULL0, MULHI, DIV, MOD, ADC, SBC, ROL, ROR
MEMORY	MEM0, MEM1, MEM2, MEMLO, MEMHI
STACK	STACK
COM	COMA, COMD
BRANCH	BR0, BR1

Table 6.3.3: OISC processor instruction source groups used in instruction composition test

Each function was ran on simulated processor, program counter and instruction been recorded into file at every cycle. File recording was done with SystemVerilog test bench, it started recording when program counter matched `.start` location and stopped when it matched `.done` location. Code shown in Listing 3 enabled both location to be static, not depending on test function executed.

Listing 3: Assembly frame for executing tests

```

setup:
JUMP .start
.done:
JUMP .done
.start:
; Setup values
; Call function
JUMP .done

```

Each function recorded file then was further analysed and each instruction was grouped. Recorded program counter was used to find effective program space. This has been achieved by calculating unique instances of program counter and summing up instruction size for each of them. In RISC, dynamic instruction size has been taken into account.

From results in Figure 6.3.1 few key differences can be seen. Across every test, OISC has much more *BRANCH* destination and *MOVE* source groups. *BRANCH* group can be explained by emulated *CALL*, *RET* and *JUMP* instruction explained in section 5.4.2. High number of *MOVE* source group instructions may be explained by using immediate values as separate source, where RISC uses instruction that integrate with immediate in instructions such as *ADDI*. In most cases *ALU* group instructions are also higher than for OISC comparing to RISC. This shows lower OISC *ALU* efficiency, mostly due to need to move data to separate accumulators.

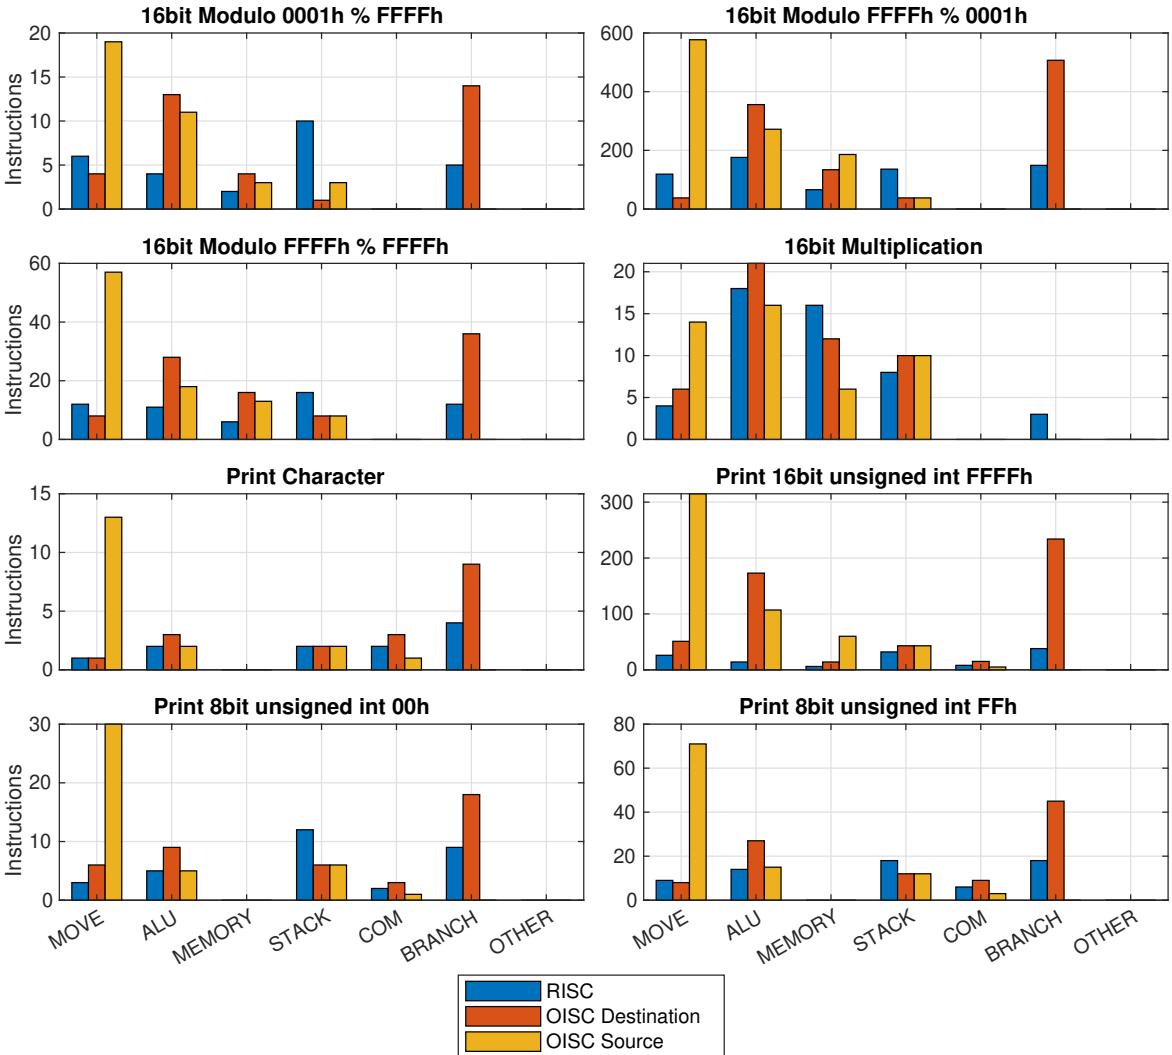


Figure 6.3.1: Graph of instruction composition for every benchmark program.

6.3.2 Performance

This subsection investigates time and clock cycles to run benchmark programs. Simulation was used to find a number of cycles required to execute each function. Note that prime number calculator was not simulated due to too complex dynamic nature of program.

Print 16bit decimal and modulo operation were executed with different arguments to show the worst and the best case scenarios as algorithms length depend on inputs. This is not the case for 16bit multiplication as this it has no branching.

Results are shown in Figure 6.3.2. In most cases, OISC requires around 55-67%

more instruction, with some exceptions. These results can be better explained in following subsection 6.3.1.

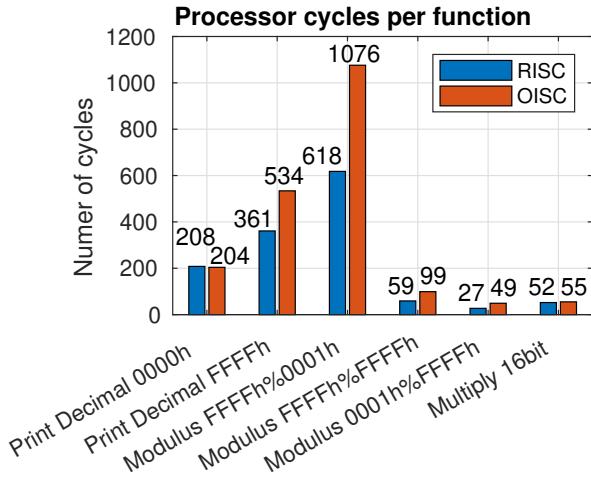


Figure 6.3.2: Simulated results of cycles that taken to perform function.

Another set of benchmarks have been performed and on both processors once they been implemented on FPGA. Time taken for perform each set has been recorded. This have been done via UART connection, a single character was sent to indicate start and stop of benchmark. In order to void slight timing variation due low baud rate of UART, each benchmark was performed many iterations. Figure 6.3.3 represents results.

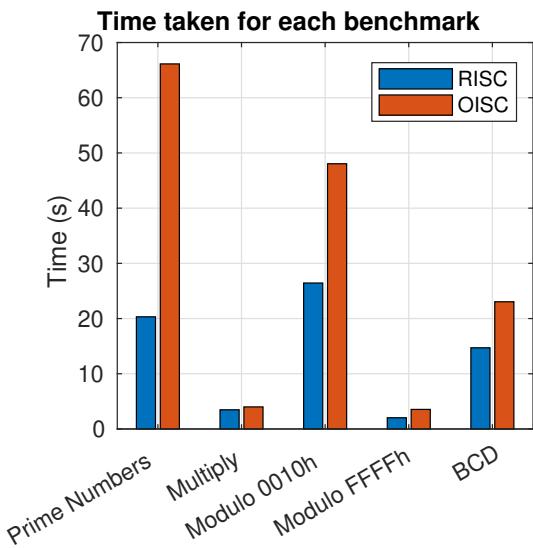


Figure 6.3.3: Time taken perform each benchmark on FPGA at 1MHz clock.

Results indicate that on average OISC takes about 71% longer to execute same benchmark. This is close to results found with simulation. Prime number calculator have taken 3.26 times longer.

Benchmarks include:

- **Prime Numbers:** Calculate every prime number between 5 to 65536.
- **Multiply:** 16bit multiplication iterated 65536 times.
- **Modulo 0010h:** 16bit $0010h$ modulo that operated on every number between 0 and 65536.
- **Modulo FFFFh:** 16bit $FFFFh$ modulo that operated on every number between 0 and 65536.
- **BDC:** Encoded 16bit binary to ASCII decimal number without printing.

6.3.3 Program space

Data collected from previous instruction composition results were also used to find effective program size. Effective program size only includes instruction that been executed depending on argument, meaning that it does not fully represent complete function. A specific argument might cause branching and skipping some function code which would not be added to effective program size. In this test, the main objective is to look difference in instruction size required to execute the same function, therefore not representing full program size is not relevant.

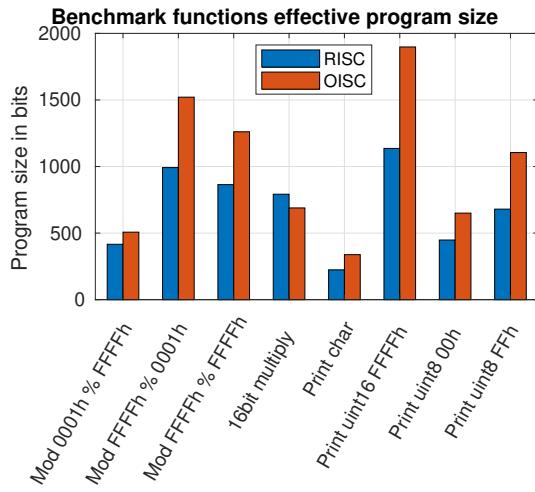


Figure 6.3.4: Bar graph showing effective size in bits each benchmark function is taking in program memory.

Figure 6.3.4 represents effective program size for each test function. On average, OISC instructions take 41.71% more space which is expected.

6.4 Maximum clock frequency

To find maximum clock frequency, processors were loaded with basic print string function and 16bit multiplication. Then frequency was constantly increased until resulting output through UART was not correct.

In order to change clock frequency, three parameters were changed and HDL code resynthesised:

- **PLL frequency multiplier and divider:** PLL takes 50MHz clock that is sourced from crystal on FPGA board and converts it to master clock f_{mclk} . Multiplier and divider values are used to adjust f_{mclk} .
- **UART frequency divider:** Division value was calculated as $D = \left\lfloor \frac{f_{mclk}}{4f_{baud}} \right\rfloor$. UART rate was set to 9600 baud. UART module itself has four times oversample.

Frequency was changed in 5MHz increments.

Theoretical maximum frequency was found using Quartus Timing Analysis tool. Slow 1200mV 85°C model was used.

	Theoretical	Actual
RISC	114.08MHz	75-70MHz
OISC	64.68MHz	45-40MHz

Table 6.4.1: Theoretical and actual maximum frequencies of both processors.

Theoretical and actual results show unexpected results shown in Table 6.4.1, RISC operated at about 40% higher maximum frequency than OISC.

As explained in Subsection 5.2.3, OISC logic blocks has about twice less time for data propagation. Keeping that in mind, and assuming that latch propagation and register setup periods are insignificant to critical path of OISC logic block, maximum OISC frequency could be double as high as, reaching 80-90MHz. This also assumes that there is no other part of processor would have limit. Further timing analysis needs to be carried out to confirm this.

6.5 Future work

RISC has more sophisticated logic for various processor components. It is expected to see RISC having better results due to its better optimisation. OISC should be implemented with multiple data & instruction buses. This could be performed with minimal changes on hardware, however would require many changes in assembly programs. Instruction composition results show that OISC takes more instructions to store values in accumulators, which can greatly benefit from multi-bus parallelisation. There a single additional bus should reduce benchmarks time by up to double, which would be more comparable with RISC. In addition, multi-bus OISC can perform truly parallel programs assuming it has enough processor resources to perform operations (for example operate different ALU operations at the same time). This

potentially would be dominant feature over RISC in time-sensitive programs, GPIO (General Purpose Input/Output) and interrupt handling.

Additional buses would not greatly increase processor logic element size, especially when using interconnect optimisation techniques [22, 23]. Matching processor complexity should also allow more fair and direct comparison specifically between two architectures.

A number of other improvements and future research are proposed:

1. Perform more tests on power analysis with different frequencies. Find the activity factor described in Subsection 6.2.1.
2. Further investigate maximum frequency. Try to resolve OISC timing issue and repeat maximum frequency test. This would allow to confirm or deny theorised higher frequency capabilities for OISC.
3. Design a higher level language compiler such as BASIC or C. This would allow to perform more complicated programs which would more closely relate to microcontroller operations. However, OISC compiler would need extra optimisation layer to efficiently organise instructions.
4. Compare proposed processor designs with other commercially available 8-bit processors such as Atmel AVR microcontrollers, Motorola 6800 family and Microchip PIC.

7 Conclusion

In this paper, two novel RISC and OISC-MOVE architectures are designed and implemented on FPGA. Logic element requirements, power consumption, maximum frequency where tested and timings of set of benchmark programs were executed to

compare these two processors to investigate OISC-MOVE advantages. It is shown that power consumption differences are insignificant, RISC managed to reach 40% higher maximum frequency at 75-70MHz, however due to a design fault in OISC. OISC required 51.7% less logic elements to implement on FPGA. Benchmarks showed that OISC took 71% longer to execute on average while requiring 41.71% more instruction space.

This project has successfully covered its goals in studying architectures and investigating alternative OISC implementation. Results shows that proposed implementation of OISC-MOVE may be only suitable for microprocessor application with very strict logic element limit.

RISC processor has shown to be superior in tests, however it has more optimised implementation. Further research is needed to investigate OISC-MOVE performance with multiple data and instruction buses to match RISC complexity.

References

- [1] T. Jamil. “RISC versus CISC”. In: vol. 14. 3. 1995, pp. 13–16. doi: 10.1109/45.464688.
- [2] E. Blem, J. Menon, and K. Sankaralingam. “Power struggles: Revisiting the RISC vs. CISC debate on contemporary ARM and x86 architectures”. In: 2013. doi: 10.1109/hpca.2013.6522302.
- [3] Minato Yokota, Kaoru Saso, and Yuko Hara-Azumi. “One-instruction set computer-based multicore processors for energy-efficient streaming data processing”. In: 2017. doi: 10.1145/3130265.3130318.
- [4] Tanvir Ahmed et al. “Synthesizable-from-C Embedded Processor Based on MIPS-ISA and OISC”. In: 2015. doi: 10.1109/euc.2015.23.
- [5] William F Gilreath and Phillip A Laplante. *Computer Architecture: A Minimalist Perspective*. Kluwer Academic Publishers, 2003.

[6] H. Corporaal and H. Mulder. “MOVE: a framework for high-performance processor design”. In: *Supercomputing '91:Proceedings of the 1991 ACM/IEEE Conference on Supercomputing*. 1991, pp. 692–701. DOI: 10 . 1145/125826.126159.

[7] Henk Corporaal. *MOVE32INT: Architecture and Programmer's Reference Manual*. Tech. rep. 1994.

[8] H. Corporaal. “Design of transport triggered architectures”. In: *Proceedings of 4th Great Lakes Symposium on VLSI*. 1994, pp. 130–135. DOI: 10.1109/GLSV.1994.289981.

[9] J. Hu et al. “A Novel Architecture for Fast RSA Key Generation Based on RNS”. In: *2011 Fourth International Symposium on Parallel Architectures, Algorithms and Programming*. 2011, pp. 345–349. DOI: 10.1109/PAAP.2011.75.

[10] A. Burian, P. Salmela, and J. Takala. “Complex fixed-point matrix inversion using transport triggered architecture”. In: *2005 IEEE International Conference on Application-Specific Systems, Architecture Processors (ASAP'05)*. 2005, pp. 107–112. DOI: 10 . 1109/ASAP.2005.25.

[11] J. ádník and J. Takala. “Low-power Programmable Processor for Fast Fourier Transform Based on Transport Triggered Architecture”. In: *ICASSP 2019 - 2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. 2019, pp. 1423–1427. DOI: 10.1109/ICASSP.2019.8682289.

[12] P. Hamalainen et al. “Implementation of encryption algorithms on transport triggered architectures”. In: *ISCAS 2001. The 2001 IEEE International Symposium on Circuits and Systems (Cat. No.01CH37196)*. Vol. 4. 2001, 726–729 vol. 4. DOI: 10.1109/ISCAS . 2001.922340.

[13] P. Salmela et al. “Scalable FIR filtering on transport triggered architecture processor”. In: *International Symposium on Signals, Circuits and Systems, 2005. ISSCS 2005*. Vol. 2. 2005, 493–496 Vol. 2. DOI: 10.1109/ISSCS . 2005.1511285.

[14] B. Rister et al. “Parallel programming of a symmetric transport-triggered architecture with applications in flexible LDPC encoding”. In: *2014 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. 2014, pp. 8380–8384. DOI: 10.1109/ICASSP.2014.6855236.

[15] J. Multanen et al. “Power optimizations for transport triggered SIMD processors”. In: *2015 International Conference on Embedded Computer Systems: Architectures, Modeling, and Simulation (SAMOS)*. 2015, pp. 303–309. DOI: 10.1109/SAMOS.2015.7363689.

[16] M. Safarpour, I. Hautala, and O. Silvén. “An Embedded Programmable Processor for Compressive Sensing Applications”. In: *2018 IEEE Nordic Circuits and Systems Conference (NORCAS): NORCHIP and International Symposium of System-on-Chip (SoC)*. 2018, pp. 1–5. DOI: 10.1109/NORCHIP.2018.8573494.

[17] J. Heikkilä et al. “Evaluating template-based instruction compression on transport triggered architectures”. In: *The 3rd IEEE International Workshop on System-on-Chip for Real-Time Applications, 2003. Proceedings*. 2003, pp. 192–195. DOI: 10 . 1109 / IWSOC.2003.1213033.

[18] J. Helkala et al. “Variable length instruction compression on Transport Triggered Architectures”. In: *2014 International Conference on Embedded Computer Systems: Architectures, Modeling, and Simulation (SAMOS XIV)*. 2014, pp. 149–155. DOI: 10 . 1109 / SAMOS.2014.6893206.

[19] J. Wei et al. “Program Compression Based on Arithmetic Coding on Transport Triggered Architecture”. In: *2008 International Conference on Embedded Software and Systems Symposia*. 2008, pp. 126–131. DOI: 10 . 1109/ICES.2008.9.

[20] Su Wang et al. “An instruction redundancy removal method on a transport triggered architecture processor”. In: *Proceedings of the 2009 12th International Symposium on Integrated Circuits*. 2009, pp. 602–604.

[21] L. Jiang, Y. Zhu, and Y. Wei. “Software Pipelining with Minimal Loop Overhead on Transport Triggered Architecture”. In: *2008 International Conference on Embedded Software and Systems*. 2008, pp. 451–458. DOI: 10.1109/ICES.2008.18.

[22] T. Pionteck et al. “Hardware evaluation of low power communication mechanisms for transport-triggered architectures”. In: *14th IEEE International Workshop on Rapid Systems Prototyping, 2003. Proceedings*. 2003, pp. 141–147. DOI: 10 . 1109 / IWRSP . 2003 . 1207041.

- [23] T. Viitanen et al. “Heuristics for greedy transport triggered architecture interconnect exploration”. In: *2014 International Conference on Compilers, Architecture and Synthesis for Embedded Systems (CASES)*. 2014, pp. 1–7. DOI: [10.1145/2656106.2656123](https://doi.org/10.1145/2656106.2656123).
- [24] S. Hauser, N. Moser, and B. Juurlink. “SynZEN: A hybrid TTA/VLIW architecture with a distributed register file”. In: *NORCHIP 2012*. 2012, pp. 1–4. DOI: [10.1109/NORCHP.2012.6403142](https://doi.org/10.1109/NORCHP.2012.6403142).
- [25] David Money Harris and Sarah L Harris. *Digital design and computer architecture*. 2nd ed. Elsevier, 2013.
- [26] François Morain. “Atkin’s Test: News from the Front”. In: 1989, pp. 626–635. DOI: [10.1007/3-540-46885-4_59](https://doi.org/10.1007/3-540-46885-4_59).

8 Appendix

8.1 Processor instruction set tables

Table 8.1.1: Instruction set for RISC processor. * Required immediate size in bytes

Instr.	Description	I-size *
<i>2 register instructions</i>		
MOVE	Copy value from one register to other	0
ADD	Arithmetical addition	0
SUB	Arithmetical subtraction	0
AND	Logical AND	0
OR	Logical OR	0
XOR	Logical XOR	0
MUL	Arithmetical multiplication	0
DIV	Arithmetical division (inc. modulo)	0
<i>1 register instructions</i>		
COPY0	Copy intimidate to a register 0	1
COPY1	Copy intimidate to a register 1	1
COPY2	Copy intimidate to a register 2	1
COPY3	Copy intimidate to a register 3	1
ADDC	Arithmetical addition with carry bit	0
ADDI	Arithmetical addition with immediate	1
SUBC	Arithmetical subtraction with carry bit	0
SUBI	Arithmetical subtraction with immediate	1
ANDI	Logical AND with immediate	1
ORI	Logical OR with immediate	1
XORI	Logical XOR with immediate	1
CI0	Replace intimidate value byte 0 for next instruction	1
CI1	Replace intimidate value byte 1 for next instruction	1
CI2	Replace intimidate value byte 2 for next instruction	1
SLL	Shift left logical	1
SRL	Shift right logical	1
SRA	Shift right arithmetical	1
LWHI	Load word (high byte)	3
SWHI	Store word (high byte, reg. only)	0
LWLO	Load word (low byte)	3
SWLO	Store word (low byte, stores high byte reg.)	3
INC	Increase by 1	0
DEC	Decrease by 1	0
GETAH	Get ALU high byte reg. (only for MUL & DIV & ROL & ROR)	0
GETIF	Get interrupt flags	0
PUSH	Push to stack	0
POP	Pop from stack	0
COM	Send/Receive to/from com. block	1
BEQ	Branch on equal	3
BGT	Branch on greater than	3

Table 8.1.1: Instruction set for RISC processor. * Required immediate size in bytes

Instr.	Description	I-size *
BGE	Branch on greater equal than	3
BZ	Branch on zero	2
<i>0 register instructions</i>		
CALL	Call function, put return to stack	2
RET	Return from function	0
JUMP	Jump to address	2
RETI	Return from interrupt	0
INTRE	Set interrupt entry pointer	2

Table 8.1.2: Instructions for OISC processor.

Name	Description
<i>Destination Addresses</i>	
ACC0	Set ALU source A accumulator
ACC1	Set ALU source B accumulator
BR0	Set Branch pointer register (low byte)
BR1	Set Branch pointer register (high byte)
BRZ	If source value is 0, set program counter to branch pointer
STACK	Push value to stack
MEM0	Set Memory pointer register (low byte)
MEM1	Set Memory pointer register (middle byte)
MEM2	Set Memory pointer register (high byte)
MEMHI	Save high byte to memory at memory pointer
MEMLO	Save low byte to memory at memory pointer
COMA	Set communication block address register
COMD	Send value to communication block
REG0	Set general purpose register 0
REG1	set general purpose register 1
<i>Source Addresses</i>	
NULL	Get constant 0
ALU0	Get value at ALU source A accumulator
ALU1	Get value at ALU source B accumulator
ADD	Get Arithmetical addition of ALU sources
ADDC	Get Arithmetical addition carry
ADC	Get Arithmetical addition of ALU sources and carry
SUB	Get Arithmetical subtraction of ALU sources
SUBC	Get Arithmetical subtraction carry
SBC	Get Arithmetical subtraction of ALU sources and carry
AND	Get Logical AND of ALU sources
OR	Get Logical OR of ALU sources
XOR	Get Logical XOR of ALU sources
SLL	Get ALU source A shifted left by source B
SRL	Get ALU source A shifted right by source B
ROL	Get rolled off value from previous SLL instance
ROR	Get rolled off value from previous SRL instance

Table 8.1.2: Instructions for OISC processor.

Name	Description
MULLO	Get Arithmetical multiplication of ALU sources (low byte)
MULHI	Get Arithmetical multiplication of ALU sources (high byte)
DIV	Get Arithmetical division of ALU sources
MOD	Get Arithmetical modulo of ALU sources
EQ	Check if ALU source A is equal to source B
GT	Check if ALU source A is greater than source B
GE	Check if ALU source A is greater or equal to source B
NE	Check if ALU source A is not equal to source B
LT	Check if ALU source A is less than source B
LE	Check if ALU source A is less or equal to source B
BR0	Get Branch pointer register value (low byte)
BR1	Get Branch pointer register value (high byte)
PC0	Get Program counter value (low byte)
PC1	Get Program counter value (high byte)
MEM0	Get Memory pointer register value (low byte)
MEM1	Get Memory pointer register value (middle byte)
MEM2	Get Memory pointer register value (high byte)
MEMHI	Load high byte from memory at memory pointer
MEMLO	Load low byte from memory at memory pointer
STACK	Pop value from stack
ST0	Get stack address value (low byte)
ST1	Get stack address value (high byte)
COMA	Get communication block address register value
COMD	Read value from communication block
REG0	Get value from general purpose register 0
REG1	Get value from general purpose register 1