

UNIVERSITY COLLEGE LONDON

DEPARTMENT OF ELECTRONIC AND ELECTRICAL ENGINEERING

Performance characterisation of 8-bit RISC and OISC architectures

<i>Author:</i>	<i>Supervisor:</i>	<i>Second Assessor:</i>
Mindaugas JARMOLOVIČIUS zceemja@ucl.ac.uk	Prof. Robert KILLEY r.killey@ucl.ac.uk	Dr. Ed ROMANS e.romans@ucl.ac.uk

A BEng Project Final Report

March 27, 2020

1 Abstract

2 Introduction

Since the 70s there has been a rise of many processor architectures that try to fulfil specific performance and power application constraints. One of more noticeable cases are ARM's RISC architecture being used in mobile devices instead of the more popular and robust x86 CISC (Complex Instruction Set Computer) architecture in favour of simplicity, cost and lower power consumption [1, 2]. It has been shown that in low power applications, such as IoTs (Internet of Things), OISC implementation can be superior in power and data throughput comparing to traditional RISC architectures [3, 4]. This project proposes to compare two novel RISC and OISC 8bit architectures and compare their performance, design complexity and efficiency.

2.1 Aims and Objectives

The project has three main objectives:

1. Design and build a RISC based processor. As this is aimed for low power and performance applications it will be 8bit word processor with four general purpose registers, structure is similar to MIPS.
2. Design and build an OISC based processor. There are many different types of OISC processor, MOVE variant has been selected which is described in References:sec:theory chapter. This type of OISC architecture variant may be also named TTA (Transport Triggered Architecture).
3. Design a fair benchmark that both processors could execute. This benchmark include different algorithms that are commonly used in controllers, IoT devices or similar low power microprocessor applications.

2.2 Supporting Theory

This section goes though supporting theory of RISC and OISC architectures.

Principal functions of general OISC architecture should have advantage in performance and power consumption while having lower transistor count. This expectation is supported mainly by the following papers:

- Using OISC SUBLEQ as a coprocessor for the MIPS-ISA processor to emulate the functionality of different classes shows desirable area/performance/power trade-offs [4].
- Comparing OISC SUBLEQ multicore to RISC achieves better performance and lower energy for streaming data processing [3]. More specific OISC type - MOVE has been researched since early 90s. It showed that MOVE can benefits of VLIW (very large instruction word) arrangement, classifying it as SIMO (single instruction, multiple operation) or SIMT (single instruction, multiple transports) architectures. Problem with all of these arrangement is that they exhibit poor or complex hardware utilization.

OISC MOVE has been proposed as a design framework enabling lower complexity, better hardware utilization, and scalable performance [5]. A MOVE32INT architecture as been designed [6] and proven to be superior architecture to RISC. Using $1.6\mu m$ fabrication technology RISC achieved 20MHz clock with 20Mops/second, MOVE32INT implemented using SoGs (Sea of Gates) achieved 80MHz with 320Mops/second [7].

TTA framework as further used in other researches to implement Application-Specific Instruction Set Processors (ASIPs) to solve various problems. Some of the relevant examples are RSA calculation [27]; matrix inversion [28]; Fast Fourier Transform (FFT) [25]; IWEPE, RC4 and 3DES encryption [19]; Parallel Finite Impulse Response (FIR) filter [17]; Low-Density Parity-Check (LDPC) encoding [18]; Software Defined Radio (SDR) [23]. One of the most recent researches use TTA architecture to solve Compressive Sensing algorithms. It

showed 9 times of energy efficiency that of FPGA implemented NIOS II processor, and theoretical 20 time energy efficiency that of ARM Cortex-A15 [26]. Most of these researches show that TTA has greater power efficiency, higher clock frequency, lower logic resource count.

These benefits come with an expense, VLIW has bigger instruction word therefore bigger program size. TTA especially suffers from this due to redundant instructions. Some proposed solutions are variable length instructions with templates, which reduced program size between 30% and 44%; [16, 31]; compression based on arithmetic coding [14]; and method to remove redundant instructions [13].

With proposed MOVE framework hardware utilisation shown to be improved by reducing transition activity [21], reducing interconnects shown saving 13% of energy [22] on small scale. A novel architecture named SynZEN also showed a further improvements by using adaptable processing unit and simple control logic [30].

There is a lack of research investigating and comparing more general purpose OISC MOVE 8bit processor for lower power applications. The main theory for OISC architecture used in this project will be based on [9, 10, 11, 12].

Section 3 4 . Section 5 explains both processor design choices and how each processor part is implemented on OISC and RISC processor. It also includes assembly design. In section 6, results will be discussed, including benchmark methods. Summary and conclusion of design and results can be found in section 7. Appendix in section 9 includes any other information such as both processor instruction set.

3 Goals and Objectives

This project has three main motivations:

1. Compare how well OISC MOVE architecture would perform in low performance microcontroller application comparing to equivalent RISC architecture.
2. Study and explore computer architectures, SystemVerilog and assembly languages.
3. View an alternative method of using OISC MOVE as SISO (single instruction, single operation) architecture, comparing to more commonly implemented TTAs architectures that are either VLIW (very large instruction word) SIMO type (single instruction, multiple operation) or SIMT (single instruction, multiple transports).

4 Theory and Analytical Bases

RISC that this paper will be exploring is classical SISO (single instruction, single operation) processor. TTAs are usually of type SIMT (single instruction, multiple transports) [7]; A middle between these two classes is SIMO type (single instruction, multiple operation)

Decided design criteria:

- Minimal instruction size
- Minimalistic design

5 Technical Method

This section describes methods and design choices used to construct two processors.

5.1 Machine Code

5.1.1 RISC

As the aim of instruction size to be as minimal as possible, RISC instruction decided to be 8bits with optional additional immediate value from 1 to 3 bytes. Immediate values are explained in section 5.4.

Decision was made to have instruction compose of operation code two operands - source/destination and source, which is similar to x86 architecture rather than MIPS. Three possible combinations of register address sizes are possible in such case from one to three bits. Two was selected as it allow having four general purpose registers which is sufficient for most applications, and allow four bits for operation code - allowing up to 16 instructions.

Due to small amount of available operation codes and not all instructions requiring two operands (for example JUMP instruction may not need any operands or could use one operand to have address offset), other two type instructions are added to the design - with one and zero operands. See figure 5.1.1. This enabled processor to have 45 different instructions while maintaining minimal instruction size. Final design has:

- 8 2-operand instructions
- 32 1-operand instructions
- 5 0-operand instructions

Full list of RISC instructions are listed in table 9.1.1 in Appendix section.

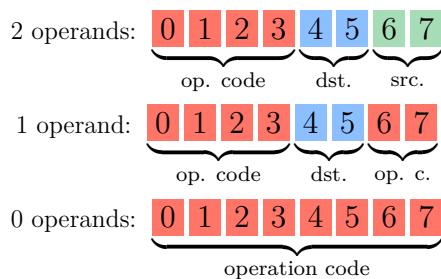


Figure 5.1.1: RISC instructions composition. Number inside box represents bit index. Destination (dst.) bits represents of source and destination register address.

5.1.2 OISC

As OISC requires only a single instruction, composition of instruction mainly requires

two parts - source and destination. To allow higher instruction flexibility a immediate bit has been added to replace source address by immediate value. Composition of finalised machine code is shown in figure 5.1.2.




Figure 5.1.2: OISC instruction composition. Number inside box represents bit index.

Decision was made to have source address to be eight bits to allow it be replaced with immediate value. Destination address was chosen to be as minimal as possible, leaving only four bits or 16 possible destinations. Final design has **15** destination and **41** source addresses. This is not the most space efficient design as 41 source addresses would require only six bits for address, wasting two bits every time non-immediate source is used.

Full list of OISC sources and destinations are listed in table 9.1.2 in Appendix section.

5.2 Arithmetic Logic Unit

This section will discuss ALU implementations of both processors. For fair comparison between OISC and RISC, ALU in both system will have the same capabilities described in table 5.2.1.

Name	Description
ADD	Arithmetic addition (inc. carry)
SUB	Arithmetic subtraction (inc. carry)
AND	Bitwise AND
OR	Bitwise OR
XOR	Bitwise XOR
SLL	Shift left logical
SRL	Shift right logical
ROL	Shifted carry from previous SLL
ROR	Shifted carry from previous SRL
MUL	Arithmetic multiplication
DIV	Arithmetic division
MOD	Arithmetic modulus

Table 5.2.1: Supported ALU commands for both processors

5.2.1 OISC

Due to the structure of OISC processor, ALU source A and B are two latches that are written into when ALU0 or ALU1 destination address is present. ALU sources are connected with every ALU operator and performed in single clock cycle. This value is stored in register so that it would immediately available in a next clock cycle as a

source data. Figure 5.2.1 represents logic diagram of ALU with only addition and multiplication operators present. Note that output of $EQ3$ is connected to enable of $REG3$, enabling output of carry to be only read after ADD source is requested. This previous source memory is also used for SUB, ROL and ROR operations. This allows processor to perform other operations such as store or load values, before accessing carry bit, or carried byte for ROL and ROR operations.

5.2.2 RISC

RISC processor has very similar structure to OISC with two exceptions. Inputs to ALU comes from logic router that decided how to route data in datapath. Output buffers are replaced by one multiplexer that selects single output from all ALU operations. Another point is that RISC ALU output is 16bit, higher byte saved in "ALU high byte register" for MUL, MOD, ROL and ROR operations. This register is accessible with GETAH instruction.

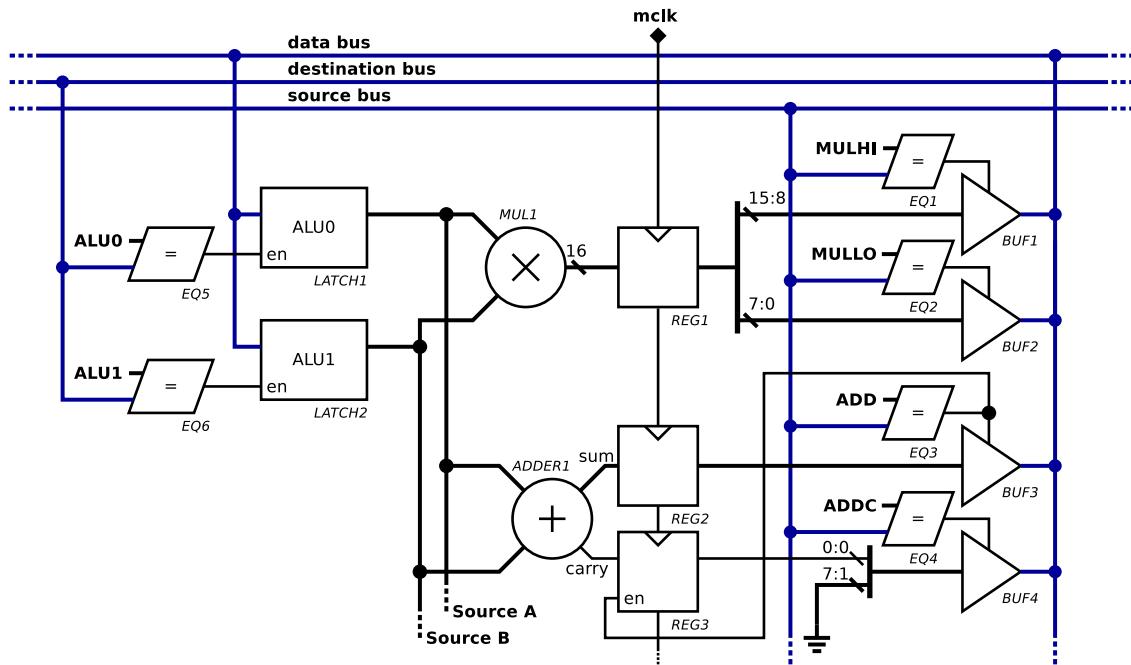


Figure 5.2.1: Digital diagram of OISC partial ALU logic

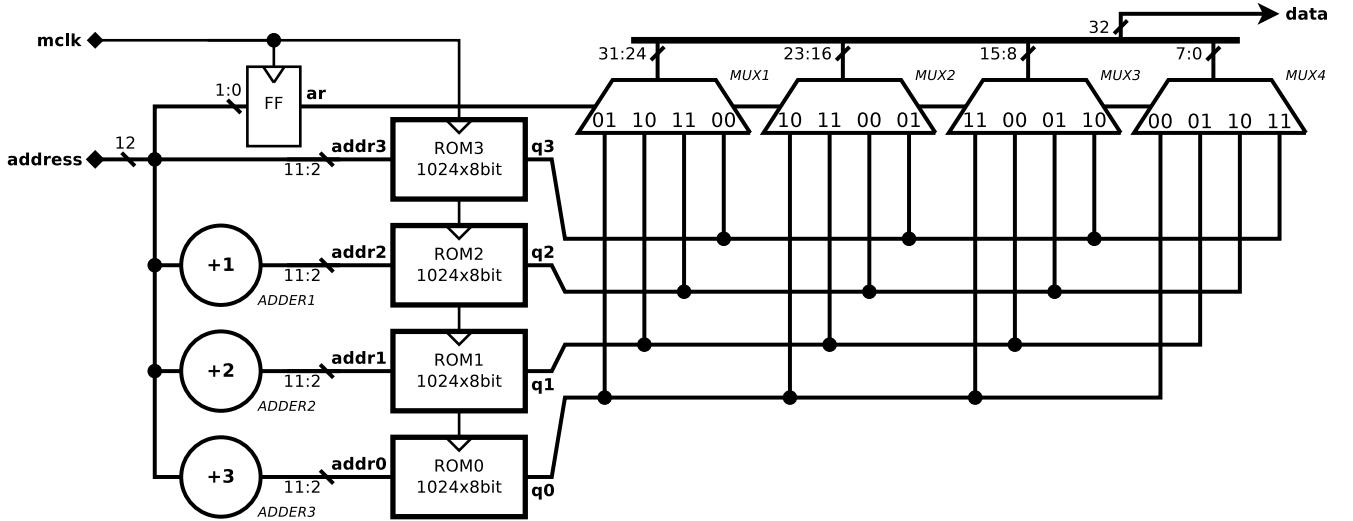


Figure 5.3.1: Digital diagram of RISC sliced ROM memory logic

5.3 Memory

This section describes how instruction memory (ROM) is implemented for both processors.

Listing 1: RISC sliced ROM memory multiplexer arrangement Verilog code

```

case (ar)
2'b00: data={q3,q2,q1,q0};
2'b01: data={q0,q3,q2,q1};
2'b10: data={q1,q0,q3,q2};
2'b11: data={q2,q1,q0,q3};
endcase

```

5.3.2 OISC

OISC instructions are fixed 13 bits, which causes different problems to RISC sliced memory - non-standard memory word size. To implement ROM in FPGA, Altera Cyclone IV M9K memory configurable blocks were used. Each blocks as 9kB of memory each allowing 1024x9bit configuration. Combining three of such blocks together yields 27bits if readable data in single clock cycle. To store instruction code to such configuration, pairs of instruction machine code sliced into three parts plus one bit for parity check, see figure 5.3.2. Circuit extracting each instruction is fairly simple, shown in figure 5.3.3.

5.4 Instruction decoding

This section describes RISC and OISC differences between instruction decoding and

immediate value handling.

5.4.1 RISC

Already described in previous section 5.3, instruction from memory comes as 4 bytes. Least significant byte is sent to control block, other three bytes are sent to immediate override block (IMO) shown in figure 5.4.1. These three bytes are labelled as **immr**.

IMO block is a solution to change immediate value which enabled dynamically calculated memory pointers, branches dependant on register value or any other function that needs instruction immediate value been replaced by calculated register value. IMO is controlled by control block and **cdi.imoctl** signal, which is changed by CI0, CI1 and CI2 instructions. When signal is 0h, this block is transparent connecting **immr** directly to **imm**. When any of CI instructions executed, one of IMO register is overridden by *reg1* value from register file. In order to override two or three bytes of

immediate, CI instructions need to be executed in order. Only for one next instruction after last CI will have immediate bytes changed depending on what are values in *IMO* registers.

This circuit has two disadvantages:

1. Overriding immediate bytes takes one or more clock cycles,
2. At override, **immr** bytes are ignored therefore they are wasting instruction memory space.

Second point can be resolved by designing a circuit that would subtract the amount of overridden IMO bytes from *pc_off* signal (program counter offset that is dependant on i-size value) at the program counter, thus effectively saving instruction memory space. This solution however would introduce a complication with the assembler as additional checks would need to be done during compiling to check if IMO instruction are used.

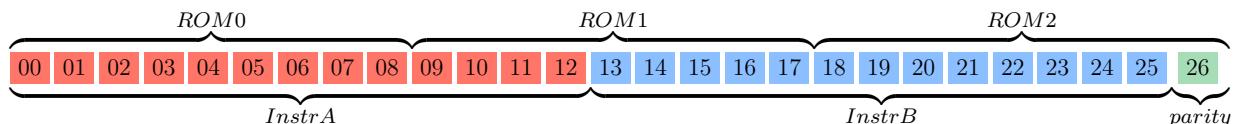


Figure 5.3.2: OISC three memory words composition. Number inside box represents bit index.

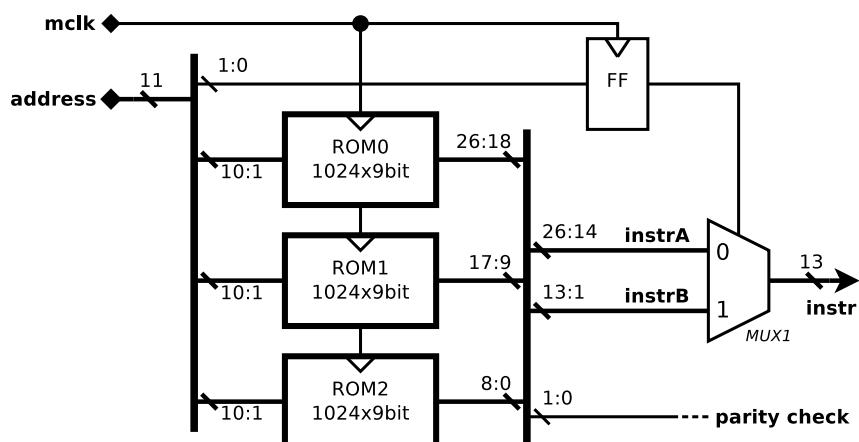


Figure 5.3.3: Digital diagram of OISC instruction ROM logic

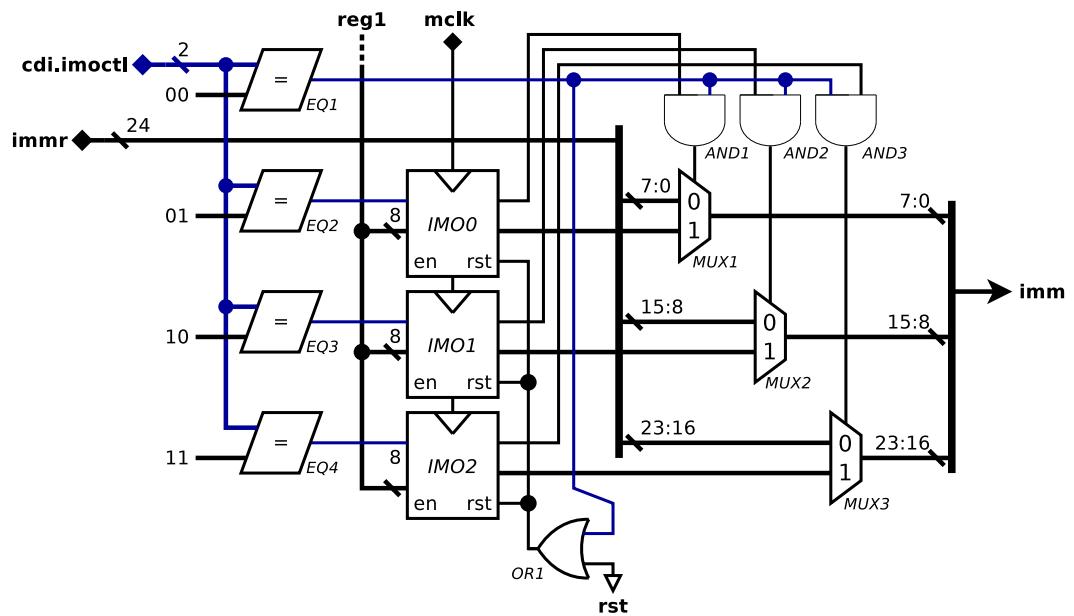


Figure 5.4.1: Digital diagram of RISC immediate override system

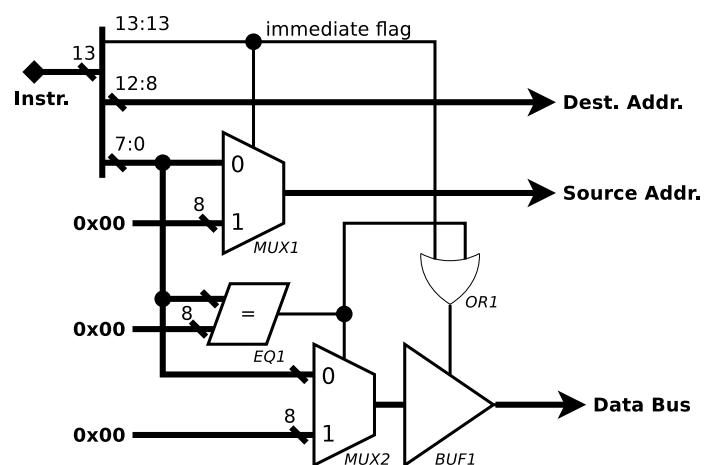


Figure 5.4.2: Digital diagram of OISC instruction decoder

5.4.2 OISC

OISC immediate value is set in instruction decoder shown in figure 5.4.2. Decoder operation is simple - instruction machine code is split into three parts as described in 5.1.2. If instruction source address is 00h, connect data bus with constant 0 via *MUX2*. If immediate bit is 1, set source address to 00h (to make sure no other buffer source connects to data bus), and connect instruction source address (immediate value) to databus via *MUX2* and *BUF1*.

6 Results and Analysis

6.1 FPGA logic component composition

This subsection looks at test and its results to find how much FPGA logic components each processor takes and what is composition of each part.

Test was performed with Quartus synthesis tool and viewing flow summary report. This report includes synthesised design metrics including total logic elements, registers, memory bits and other FPGA resources. Test will only look at logic elements and registers. Total number of logic elements was found out by synthesising full processors, then commenting relevant parts of code, re-synthesising and viewing changes in total logic elements. Such method may not be the most accurate, because during HDL synthesis circuit is optimised and unused connections removed. This means that more logic may be not synthesised than intended.

There are four parts of each processor that will be tested:

1. **Common** - processor auxiliary logic that is used by both processors. It includes communication block with UART, RAM and PLL (Phase-Locked Loop, for master clock generation).

2. **ALU** - as described in section 5.2, both processors have slightly different implementation of ALU.
3. **Memory** - processors memory management, including stack.
4. **Other** - reminding logic of processor that was not analysed.

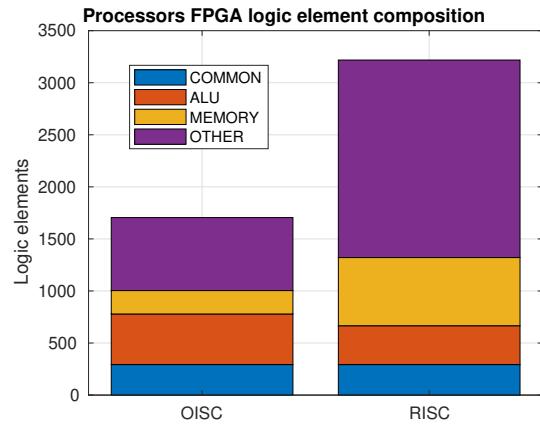


Figure 6.1.1: Bar graph of FPGA logic components taken by each processor.

Results of a test are shown in figures 6.1.1 and 6.1.2. Common logic uses 293 logic elements and 170 registers. OISC uses 1705 logic elements, while RISC uses 3218. Excluding common logic, OISC takes 48.3% of RISC's logic elements.

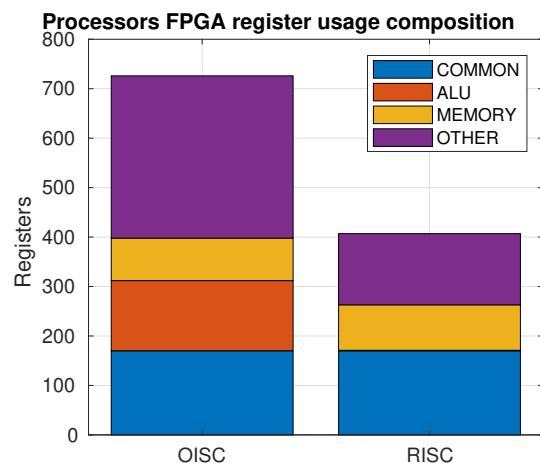


Figure 6.1.2: Bar graph of FPGA register resources taken by each processor.

OISC uses 726 logic elements, while RISC uses 407. Excluding common logic, OISC uses 78.4% more registers than RISC.

Looking at composition, OISC ALU takes 30.2% more logic gates. Looking at figure 6.1.2, high number of OISC ALU registers can be observed which concludes, that higher resource usage is OISC ALU code include buffer logic.

Memory logic elements composition of OISC is only 34.4% of RISC's and 7% lower for register resources, comparing to RISC. This indicate that by removing memory logic for RISC, synthesis tool may removed also other parts of processor, possibly part of control block because it mostly contains combinational logic.

Other logic includes instruction decoding with ROM, register file, program counter. RISC exclusively has control block. Note that OISC uses only three ROM memory blocks whereas RISC uses four as explained in section 5.3, however this should make a minimal difference as M9K memory blocks are not included in FPGA logic element or register count. Comparing both processors, OISC has only 37% of other logic components to RISC, however it has 2.28 times more registers. This shows a logic component - register trade-off. OISC buffer and common registers logic that connects bus require many more registers whereas RISC uses combination logic in control block in order to control same data in datapath.

Much higher logic components in RISC can be also explained more complicated register file, ROM memory logic and program counter. All of these components has some additional logic for timing correction or additional functionality required by these blocks integration into datapath.

6.2 Benchmark Programs

6.2.1 Number of instructions

6.2.2 Instruction composition

Function composition was executed with following code:

Listing 2: RISC assembly frame for executing tests

```
setup:
    JUMP .start
.done:
    JUMP .done
.start:
    ; Setup values
    ; Call function
    JUMP .done
```

Listing 3: OISC assembly frame for executing tests

```
setup:
    BR1 .start @1
    BR0 .start @0
    BRZ 0x00
.done:
    BRZ 0x00
.start:
    ; Setup values
    ; Call function
    BR1 .done @1
    BR0 .done @0
    BRZ 0x00
```

6.3 Maximum clock frequency

6.4

7 Conclusion

8 References

References

- [1] T. Jamil. “RISC versus CISC”. In: vol. 14. 3. 1995, pp. 13–16. DOI: 10.1109/45.464688.
- [2] E. Blem, J. Menon, and K. Sankaralingam. “Power struggles: Revisiting the RISC vs. CISC debate on contemporary ARM and x86 architectures”. In: 2013. DOI: 10.1109/hpca.2013.6522302.

[3] Minato Yokota, Kaoru Saso, and Yuko Hara-Azumi. “One-instruction set computer-based multicore processors for energy-efficient streaming data processing”. In: 2017. DOI: 10 . 1145/3130265.3130318.

[4] Tanvir Ahmed et al. “Synthesizable-from-C Embedded Processor Based on MIPS-ISA and OISC”. In: 2015. DOI: 10 . 1109/euc.2015.23.

[5] H. Corporaal and H. Mulder. “MOVE: a framework for high-performance processor design”. In: *Supercomputing '91:Proceedings of the 1991 ACM/IEEE Conference on Supercomputing*. 1991, pp. 692–701. DOI: 10 . 1145/125826.126159.

[6] Henk Corporaal. *MOVE32INT: Architecture and Programmer's Reference Manual*. Tech. rep. 1994.

[7] H. Corporaal. “Design of transport triggered architectures”. In: *Proceedings of 4th Great Lakes Symposium on VLSI*. 1994, pp. 130–135. DOI: 10 . 1109/GLSV.1994.289981.

[8] David Money Harris and Sarah L Harris. *Digital design and computer architecture*. 2nd ed. Elsevier, 2013.

[9] Jia Jan Ong, L.-M. Ang, and K. P. Seng. “Implementation of (15, 9) Reed Solomon Minimal Instruction Set Computing on FPGA using Handel-C”. In: 2010. DOI: 10 . 1109/iccaie.2010.5735103.

[10] William F Gilreath and Phillip A Laplante. *Computer Architecture: A Minimalist Perspective*. Kluwer Academic Publishers, 2003.

[11] J. H. Kong et al. “Minimal Instruction Set FPGA AES processor using Handel”. In: 2010. DOI: 10 . 1109/iccaie.2010.5735100.

[12] K. S. Dharshana, Kannan Balasubramanian, and M. Arun. “Encrypted computation on a one instruction set architecture”. In: 2016. DOI: 10 . 1109/iccpct.2016.7530376.

[13] Su Wang et al. “An instruction redundancy removal method on a transport triggered architecture processor”. In: *Proceedings of the 2009 12th International Symposium on Integrated Circuits*. 2009, pp. 602–604.

[14] J. Wei et al. “Program Compression Based on Arithmetic Coding on Transport Triggered Architecture”. In: *2008 International Conference on Embedded Software and Systems Symposia*. 2008, pp. 126–131. DOI: 10 . 1109/ICESS.Symposia.2008.9.

[15] F. Adamec and T. Fryza. “Introduction to the new Packet Triggered Architecture for pipelined and parallel data processing”. In: *Proceedings of 21st International Conference Radioelektronika 2011*. 2011, pp. 1–4. DOI: 10 . 1109 / RADIOELEK . 2011 . 5936440.

[16] J. Heikkinen et al. “Evaluating template-based instruction compression on transport triggered architectures”. In: *The 3rd IEEE International Workshop on System-on-Chip for Real-Time Applications, 2003. Proceedings*. 2003, pp. 192–195. DOI: 10 . 1109/IWSOC.2003.1213033.

[17] P. Salmela et al. “Scalable FIR filtering on transport triggered architecture processor”. In: *International Symposium on Signals, Circuits and Systems, 2005. ISSCS 2005*. Vol. 2. 2005, 493–496 Vol. 2. DOI: 10 . 1109/ISSCS.2005.1511285.

[18] B. Rister et al. “Parallel programming of a symmetric transport-triggered architecture with applications in flexible LDPC encoding”. In: *2014 IEEE International Conference on Acous-*

tics, Speech and Signal Processing (ICASSP). 2014, pp. 8380–8384. DOI: 10.1109/ICASSP.2014.6855236.

[19] P. Hamalainen et al. “Implementation of encryption algorithms on transport triggered architectures”. In: *ISCAS 2001. The 2001 IEEE International Symposium on Circuits and Systems (Cat. No.01CH37196)*. Vol. 4. 2001, 726–729 vol. 4. DOI: 10.1109/ISCAS.2001.922340.

[20] L. Jiang, Y. Zhu, and Y. Wei. “Software Pipelining with Minimal Loop Overhead on Transport Triggered Architecture”. In: *2008 International Conference on Embedded Software and Systems*. 2008, pp. 451–458. DOI: 10.1109/ICESS.2008.18.

[21] T. Pionteck et al. “Hardware evaluation of low power communication mechanisms for transport-triggered architectures”. In: *14th IEEE International Workshop on Rapid Systems Prototyping, 2003. Proceedings*. 2003, pp. 141–147. DOI: 10.1109/IWRSP.2003.1207041.

[22] T. Viitanen et al. “Heuristics for greedy transport triggered architecture interconnect exploration”. In: *2014 International Conference on Compilers, Architecture and Synthesis for Embedded Systems (CASES)*. 2014, pp. 1–7. DOI: 10.1145/2656106.2656123.

[23] J. Multanen et al. “Power optimizations for transport triggered SIMD processors”. In: *2015 International Conference on Embedded Computer Systems: Architectures, Modeling, and Simulation (SAMOS)*. 2015, pp. 303–309. DOI: 10.1109/SAMOS.2015.7363689.

[24] P. Jääskeläinen et al. “Transport-Triggered Soft Cores”. In: *2018 IEEE International Parallel and Distributed Processing Symposium Workshops (IPDPSW)*. 2018, pp. 83–90. DOI: 10.1109/IPDPSW.2018.00022.

[25] J. ádník and J. Takala. “Low-power Programmable Processor for Fast Fourier Transform Based on Transport Triggered Architecture”. In: *ICASSP 2019 - 2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. 2019, pp. 1423–1427. DOI: 10.1109/ICASSP.2019.8682289.

[26] M. Safarpour, I. Hautala, and O. Silvén. “An Embedded Programmable Processor for Compressive Sensing Applications”. In: *2018 IEEE Nordic Circuits and Systems Conference (NORCAS): NORCHIP and International Symposium of System-on-Chip (SoC)*. 2018, pp. 1–5. DOI: 10.1109/NORCHIP.2018.8573494.

[27] J. Hu et al. “A Novel Architecture for Fast RSA Key Generation Based on RNS”. In: *2011 Fourth International Symposium on Parallel Architectures, Algorithms and Programming*. 2011, pp. 345–349. DOI: 10.1109/PAAP.2011.75.

[28] A. Burian, P. Salmela, and J. Takala. “Complex fixed-point matrix inversion using transport triggered architecture”. In: *2005 IEEE International Conference on Application-Specific Systems, Architecture Processors (ASAP’05)*. 2005, pp. 107–112. DOI: 10.1109/ASAP.2005.25.

[29] V. A. Zivkovic, R. J. W. T. Tangelander, and H. G. Kerkhoff. “Design and test space exploration of transport-triggered architectures”. In: *Proceedings Design, Automation and Test in Europe Conference and Exhibition 2000 (Cat. No. PR00537)*. 2000, pp. 146–151. DOI: 10.1109/DATE.2000.840031.

- [30] S. Hauser, N. Moser, and B. Juurlink. “SynZEN: A hybrid TTA/VLIW architecture with a distributed register file”. In: *NORCHIP 2012*. 2012, pp. 1–4. DOI: [10.1109/NORCHP.2012.6403142](https://doi.org/10.1109/NORCHP.2012.6403142).
- [31] J. Helkala et al. “Variable length instruction compression on Transport Triggered Architectures”. In: *2014 International Conference on Embedded Computer Systems: Architectures, Modeling, and Simulation (SAMOS XIV)*. 2014, pp. 149–155. DOI: [10.1109/SAMOS.2014.6893206](https://doi.org/10.1109/SAMOS.2014.6893206).

9 Appendix

9.1 Processor instruction set tables

Table 9.1.1: Instruction set for RISC processor. * Required immediate size in bytes

Instr.	Description	I-size *
<i>2 register instructions</i>		
MOVE	Copy value from one register to other	0
ADD	Arithmetical addition	0
SUB	Arithmetical subtraction	0
AND	Logical AND	0
OR	Logical OR	0
XOR	Logical XOR	0
MUL	Arithmetical multiplication	0
DIV	Arithmetical division (inc. modulus)	0
<i>1 register instructions</i>		
COPY0	Copy intimidate to a register 0	1
COPY1	Copy intimidate to a register 1	1
COPY2	Copy intimidate to a register 2	1
COPY3	Copy intimidate to a register 3	1
ADDC	Arithmetical addition with carry bit	0
ADDI	Arithmetical addition with immediate	1
SUBC	Arithmetical subtraction with carry bit	0
SUBI	Arithmetical subtraction with immediate	1
ANDI	Logical AND with immediate	1
ORI	Logical OR with immediate	1
XORI	Logical XOR with immediate	1
CI0	Replace intimidate value byte 0 for next instruction	1
CI1	Replace intimidate value byte 1 for next instruction	1
CI2	Replace intimidate value byte 2 for next instruction	1
SLL	Shift left logical	1
SRL	Shift right logical	1
SRA	Shift right arithmetical	1
LWHI	Load word (high byte)	3
SWHI	Store word (high byte, reg. only)	0
LWLO	Load word (low byte)	3
SWLO	Store word (low byte, stores high byte reg.)	3
INC	Increase by 1	0
DEC	Decrease by 1	0
GETAH	Get ALU high byte reg. (only for MUL & DIV & ROL & ROR)	0
GETIF	Get interrupt flags	0
PUSH	Push to stack	0
POP	Pop from stack	0
COM	Send/Receive to/from com. block	1
BEQ	Branch on equal	3
BGT	Branch on greater than	3

Table 9.1.1: Instruction set for RISC processor. * Required immediate size in bytes

Instr.	Description	I-size *
BGE	Branch on greater equal than	3
BZ	Branch on zero	2
<i>0 register instructions</i>		
CALL	Call function, put return to stack	2
RET	Return from function	0
JUMP	Jump to address	2
RETI	Return from interrupt	0
INTRE	Set interrupt entry pointer	2

Table 9.1.2: Instructions for OISC processor.

Name	Description
<i>Destination Addresses</i>	
ACC0	Set ALU source A accumulator
ACC1	Set ALU source B accumulator
BR0	Set Branch pointer register (low byte)
BR1	Set Branch pointer register (high byte)
BRZ	If source value is 0, set program counter to branch pointer
STACK	Push value to stack
MEM0	Set Memory pointer register (low byte)
MEM1	Set Memory pointer register (middle byte)
MEM2	Set Memory pointer register (high byte)
MEMHI	Save high byte to memory at memory pointer
MEMLO	Save low byte to memory at memory pointer
COMA	Set communication block address register
COMD	Send value to communication block
REG0	Set general purpose register 0
REG1	set general purpose register 1
<i>Source Addresses</i>	
NULL	Get constant 0
ALU0	Get value at ALU source A accumulator
ALU1	Get value at ALU source B accumulator
ADD	Get Arithmetical addition of ALU sources
ADDC	Get Arithmetical addition carry
ADC	Get Arithmetical addition of ALU sources and carry
SUB	Get Arithmetical subtraction of ALU sources
SUBC	Get Arithmetical subtraction carry
SBC	Get Arithmetical subtraction of ALU sources and carry
AND	Get Logical AND of ALU sources
OR	Get Logical OR of ALU sources
XOR	Get Logical XOR of ALU sources
SLL	Get ALU source A shifted left by source B
SRL	Get ALU source A shifted right by source B
ROL	Get rolled off value from previous SLL instance
ROR	Get rolled off value from previous SRL instance

Table 9.1.2: Instructions for OISC processor.

Name	Description
MULLO	Get Arithmetical multiplication of ALU sources (low byte)
MULHI	Get Arithmetical multiplication of ALU sources (high byte)
DIV	Get Arithmetical division of ALU sources
MOD	Get Arithmetical modulus of ALU sources
EQ	Check if ALU source A is equal to source B
GT	Check if ALU source A is greater than source B
GE	Check if ALU source A is greater or equal to source B
NE	Check if ALU source A is not equal to source B
LT	Check if ALU source A is less than source B
LE	Check if ALU source A is less or equal to source B
BR0	Get Branch pointer register value (low byte)
BR1	Get Branch pointer register value (high byte)
PC0	Get Program counter value (low byte)
PC1	Get Program counter value (high byte)
MEM0	Get Memory pointer register value (low byte)
MEM1	Get Memory pointer register value (middle byte)
MEM2	Get Memory pointer register value (high byte)
MEMHI	Load high byte from memory at memory pointer
MEMLO	Load low byte from memory at memory pointer
STACK	Pop value from stack
ST0	Get stack address value (low byte)
ST1	Get stack address value (high byte)
COMA	Get communication block address register value
COMD	Read value from communication block
REG0	Get value from general purpose register 0
REG1	Get value from general purpose register 1