

UNIVERSITY COLLEGE LONDON

DEPARTMENT OF ELECTRONIC AND ELECTRICAL ENGINEERING

Performance characterisation of 8-bit RISC and OISC architectures

<i>Author:</i>	<i>Supervisor:</i>	<i>Second Assessor:</i>
Mindaugas	Prof. Robert	Dr. Ed
JARMOLOVICIUS	KILLEY	ROMANS
zceemja@ucl.ac.uk	r.killey@ucl.ac.uk	e.romans@ucl.ac.uk

A BEng Project Interim Report

December 13, 2019

1 Abstract

This is abstract.

2 Introduction

Since 80s there been a raise of many processor architectures that try to fulfil specific performance and power application constraints. One of noticeable cases is ARM RISC (Reduced Instruction Set Computer) architecture being used in mobile devices instead of more popular and robust x86 CISC (Complex Instruction Set Computer) architecture in favour of simplicity, cost and lower power consumption [3, 2]. Its been shown that in low power applications such as IoTs (Internet of Things), OISC¹ (One Instruction Set Computer) implementation can be superior in power and data throughput comparing to traditional RISC architectures [5, 1]. This project proposes to compare two novel RISC and OISC architectures and compare their performance, design complexity and efficiency.

Project is split into 3 main objectives:

- Design and build a RISC based processor. As it is aimed for low power and performance applications this will be 8bit data size processor with 4 general purpose registers.
- Design and build an OISC based processor. There are multiple different implementations such as SUBLEQ or one proposed in chapter 3.1.
- Design a fair benchmark that both processors could execute. Benchmark may include different algorithms that are commonly used in controllers, IoT devices or similar low power microprocessor applications.

Following chapters will describe the es-

timated project outcome, project schedule and work done so far.


3 The Work Performed to Date

3.1 Supporting Theory


This section explains the theory and predictions of RISC and OISC architectures.

Figure 3.1.1 represents simplified diagrams of RISC and OISC architectures. In RISC architecture, program data travels from program memory to control block where instruction is decoded and further decided where what data is directed. Such structure requires complicated control block and additional data routing blocks. In order to increase performance of such processor one would need to add pipelining or add multiple cores. Both methods bring big disadvantages - multicore processor requires software adjustments and each core doubles the control and datapath substantially increasing die area; pipelining allow operation at higher frequencies however it brings design complications such as complicated hazard prevention logic and instruction lookup. Simplicity of OISC architecture overcomes these disadvantages by following: Pipelining can be done by individual blocks and programmably waiting for results, multicore can be simulated by adding more data and instruction buses, hazards can be prevented with software or/and integrated into address registers. Furthermore, ALU and any other processor component can be divided by adding different address registers thus allowing to utilise multiple components at the same time given that multiple data buses are used.

¹Also known as URISC (Ultimate Reduced Instruction Set Computer)

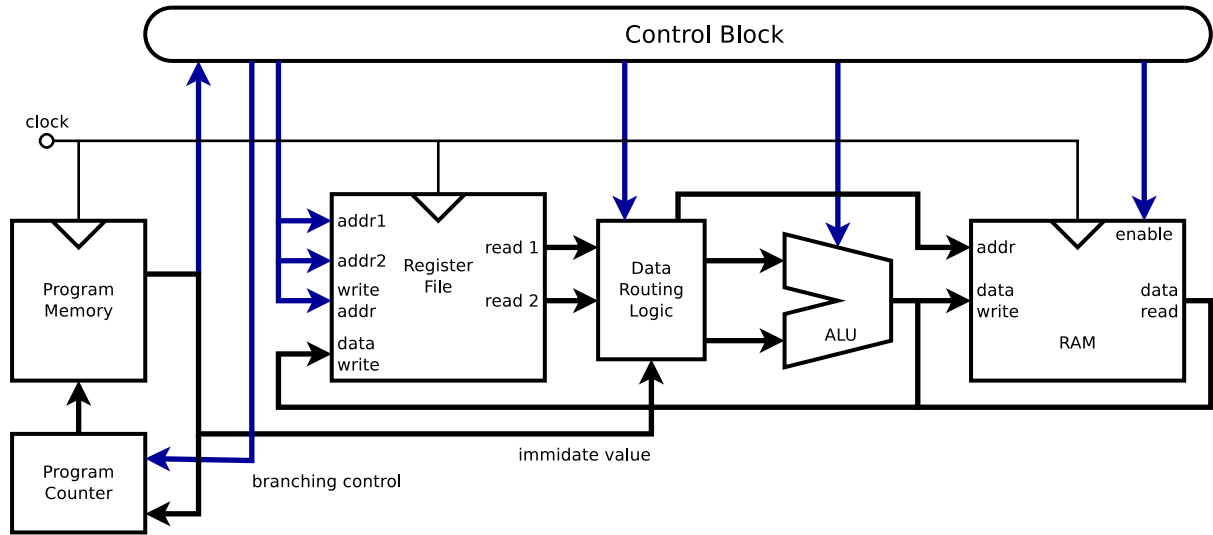

(a) RISC microarchitecture diagram

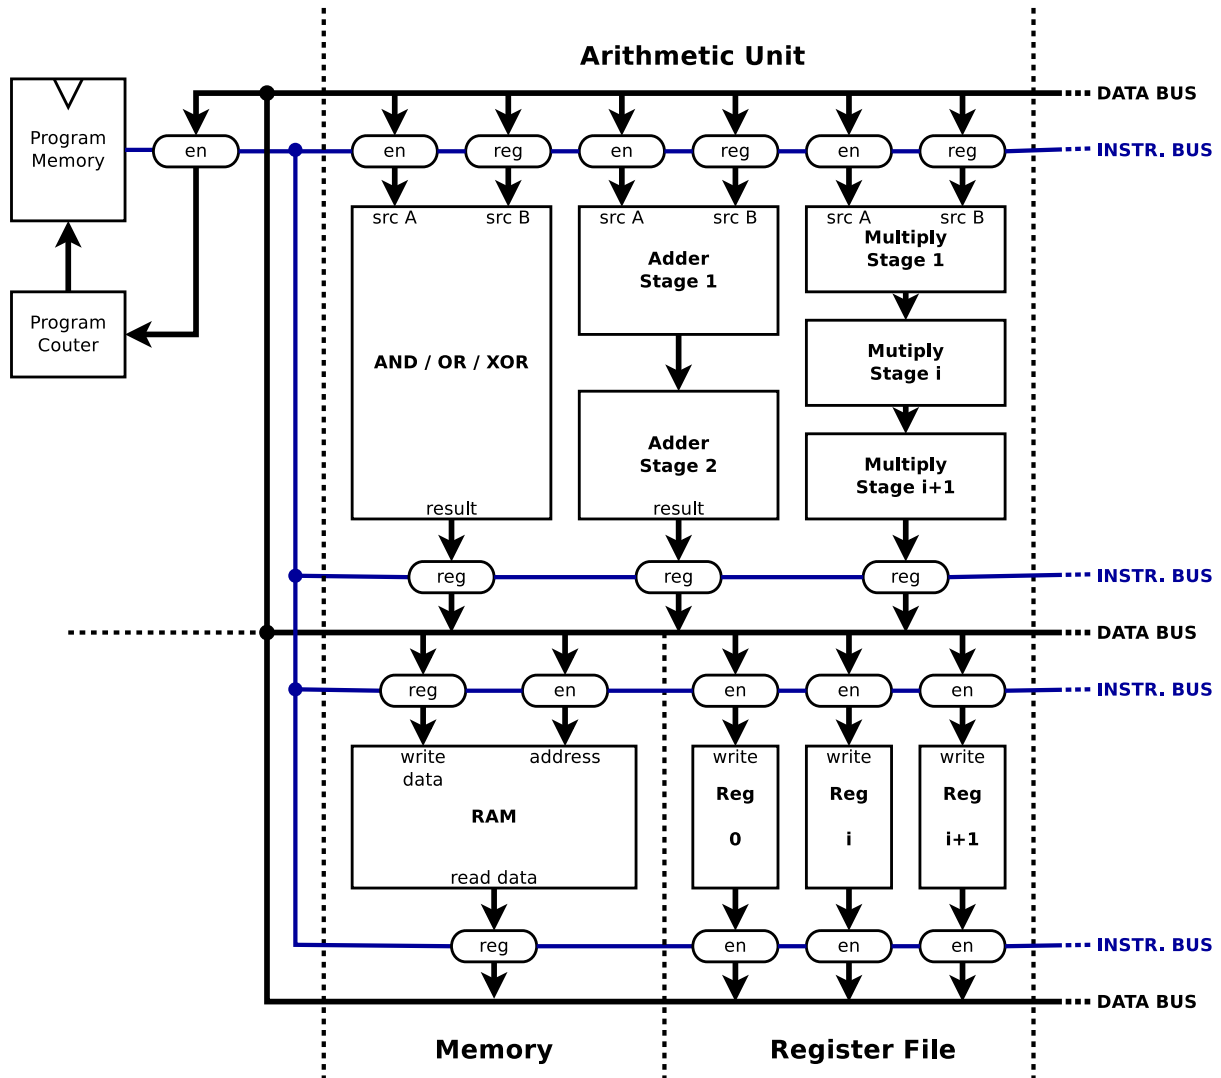

(b) Single data bus OISC microarchitecture diagram

Figure 3.1.1: Simplified diagrams of both architectures. Blue lines indicate control/instruction buses and black - data buses

3.2 Project Scheduling

As it can be seen in table 1 below, project is mainly split into Term 1 which is dedicated for RISC and Term 2 which is dedicated for OISC implementation. Approximately 3 weeks are left until final report to have enough spare time to finish all tests and complete poster & report itself. It is also expected to have a lot of coursework around this time.

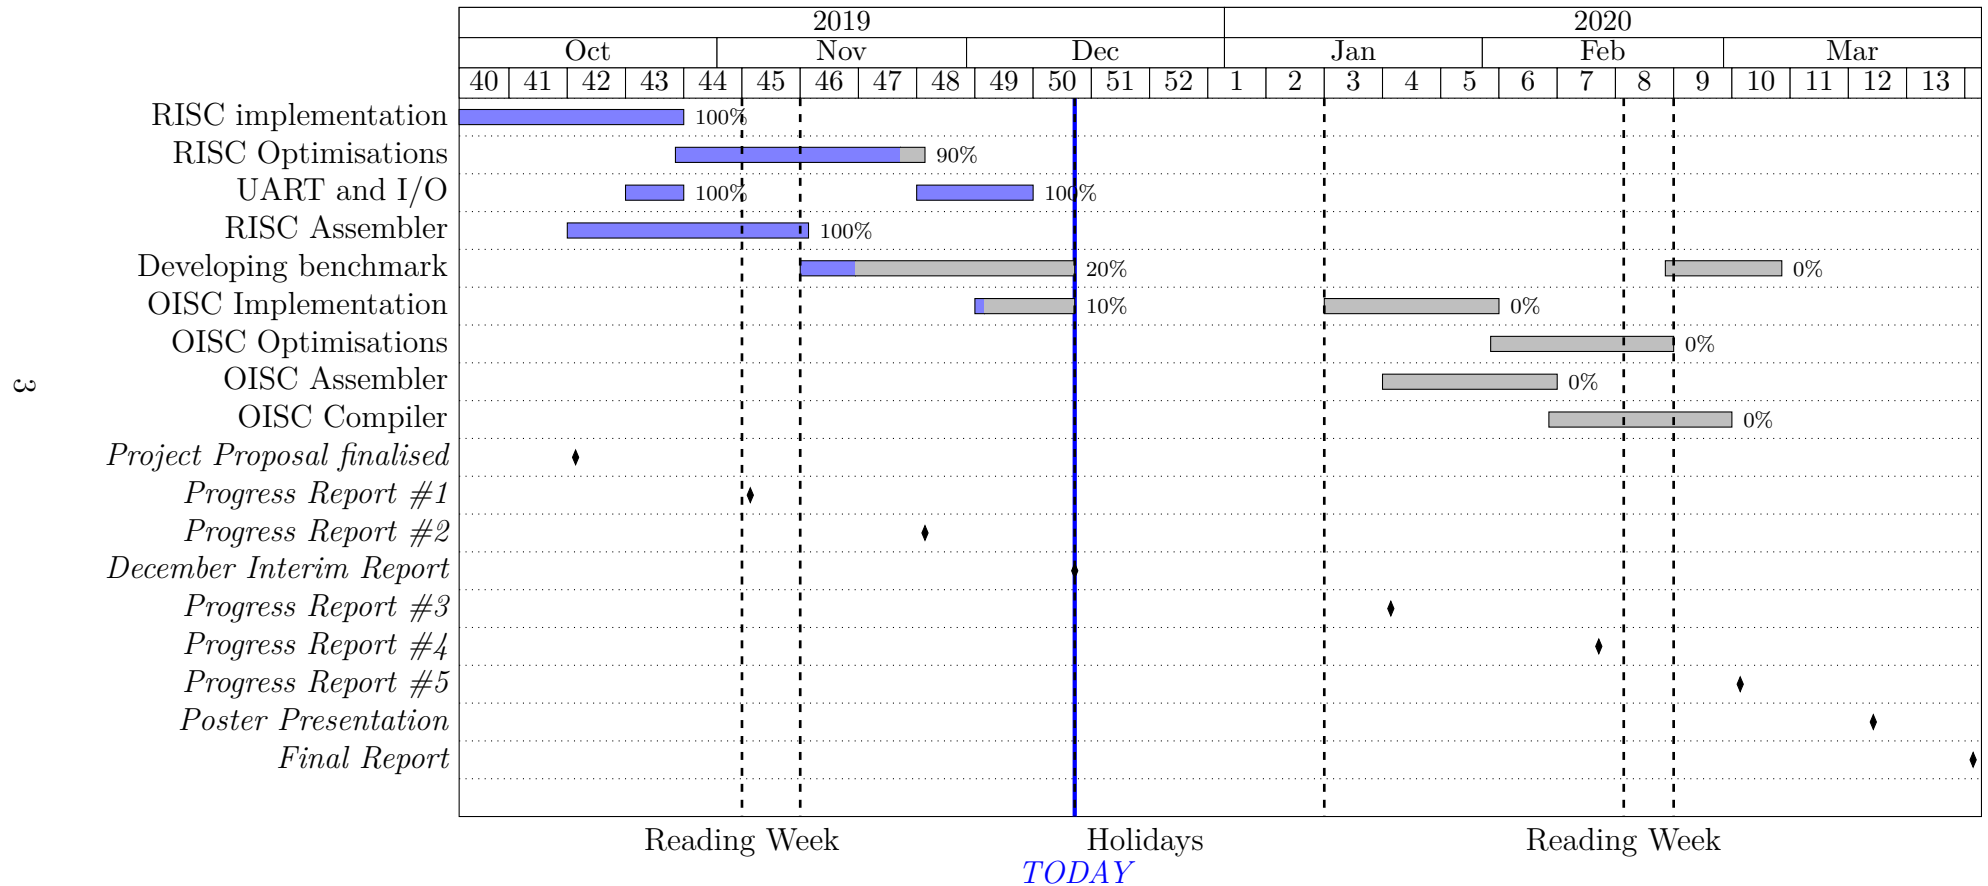


Table 1: Project schedule Gantt chart

3.3 Progress to Date

Use as many sections as you need to in order to discuss your progress so far. For example, you can use a different section to discuss each bit of the system to be constructed or designed. Include difficulties and issues impeding progress.

3.3.1 Memory

Initial plan was to use 32M-Word 16bit SDRAM chip located at FPGA board. After successfully simulating most of processor functions, next step was to synthesise and run it on FPGA which brought 2 problems: (1) Uploading program into ROM is not simple as generic Verilog unpacked register array cannot be initialised from file. Solution to this problem was solved by using FPGA built-in M9K memory that allows flexible RAM/ROM config-

uration. In addition, M9K memory can be read from/written to via JTAG connection without affecting FPGA operation which enabled quick method to upload programs without need to resynthesising processor code.

(2) Timing of SDRAM memory controller runs at much higher frequency than processor (at 100MHz versus 1MHz), initial implementation of interface between them was multiple 1-word length FIFO registers which caused memory read operation take 2 processor cycles. 3 possible solutions were considered - suspend processor clock while memory data is read which would harm performance; remove FIFO registers and rely on SDRAM clock being much greater than processor clock which is not ideal if higher processor clocks are intended to be used; use M9K. Last option was chosen due to ease of implementation and ability to read RAM content via JTAG for debugging purposes.

3.3.2 Instructions

Table 2 below represents RISC processor instructions that been implemented so far.

Table 2: Instruction set for RISC processor

Instr.	Description	Completed
<i>2 register instructions</i>		
MOVE	Copy intimate or register	x
ADD	Arithmetical addition	x
SUB	Arithmetical subtraction	x
AND	Logical AND	x
OR	Logical OR	x
XOR	Logical XOR	x
MUL	Arithmetical multiplication	x
DIV	Arithmetical division (inc. modulus)	x
<i>1 register instructions</i>		
CI0	Replace intimate value byte 0 for next instruction	x
CI1	Replace intimate value byte 1 for next instruction	x
CI2	Replace intimate value byte 2 for next instruction	x
SLL	Shift left logical	
SRL	Shift right logical	
SRA	Shift right arithmetical	
LWHI	Load word (high byte)	x
SWHI	Store word (high byte, reg. only)	x
LWLO	Load word (low byte)	x
SWLO	Store word (low byte, stores high byte reg.)	x
INC	Increase by 1	x
DEC	Decrease by 1	x
GETAH	Get ALU high byte reg. (only for MUL & DIV)	x
GETIF	Get interrupt flags	x
PUSH	Push to stack	x
POP	Pop from stack	x
COM	Send/Receive to/from com. block	x
ADDI	Arithmetical addition with intimate	x
SUBI	Arithmetical subtraction with intimate	x
ANDI	Logical AND with intimate	x
ORI	Logical OR with intimate	x
XORI	Logical XOR with intimate	x
BEQ	Branch on equal	x
BGT	Branch on greater than	x
BGE	Branch on greater equal than	x
BZ	Branch on zero	x
<i>0 register instructions</i>		
CALL	Call function, put return to stack	x
RET	Return from function	x
JUMP	Jump to address	x
RJUMP	Relative jump	
RETI	Return from interrupt	x

Table 2: Instruction set for RISC processor

Instr.	Description	Completed
INTRE	Set interrupt entry pointer	x
CLC	Clear ALU carry-in	
SETC	Set ALU carry-in	
CLS	Clear ALU sign	
SETS	Set ALU sign	
SSETS	Enable ALU sign	
CLN	Clear ALU negative	
SETN	Set ALU negative	
SSETN	Enable ALU negative	

3.3.3 Program Counter

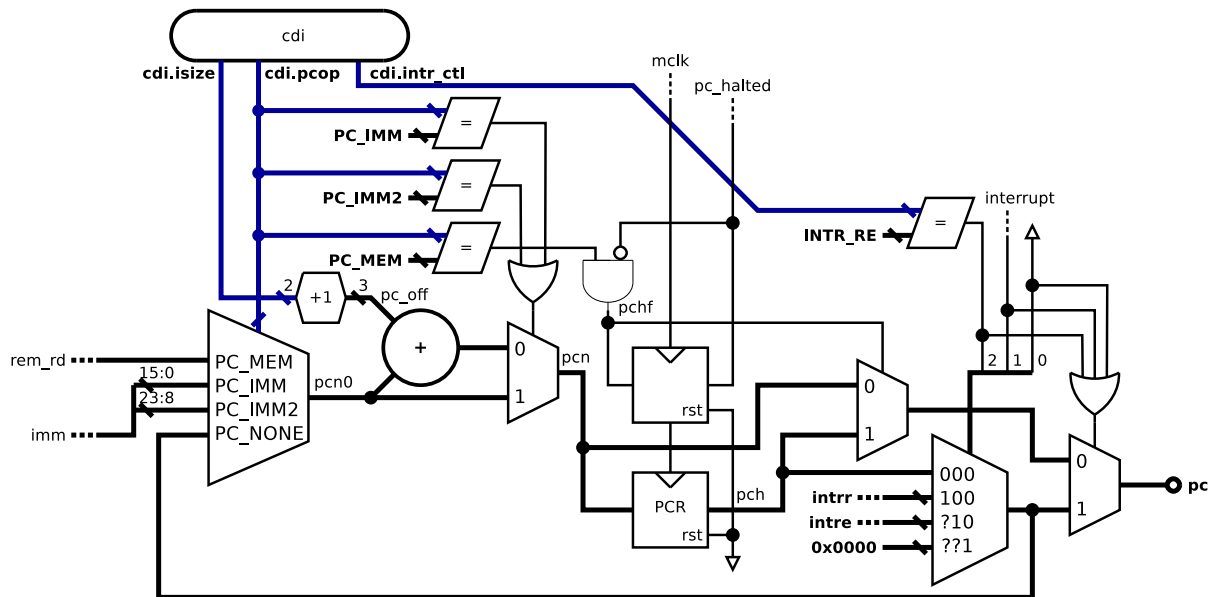


Figure 3.3.1: Digital diagram of RISC8 program counter

3.3.4 Stack Pointer

4 Summary of Difficulties and Issues

This chapter focuses on any difficulties and issues that are hindering project from moving forward.

4.1 List of Difficulties

List of difficulties currently encounter:

- Benchmark
- Assembler/Compiler

4.1.1 Benchmark

One of the difficulties is to design an appropriate benchmark that could test scenarios used in actual such processor applications. Other issue comes with writing benchmark itself, for instance benchmark test to finding prime number may have used many different algorithms where one of the fastest and used in actual industry may be "Sieve

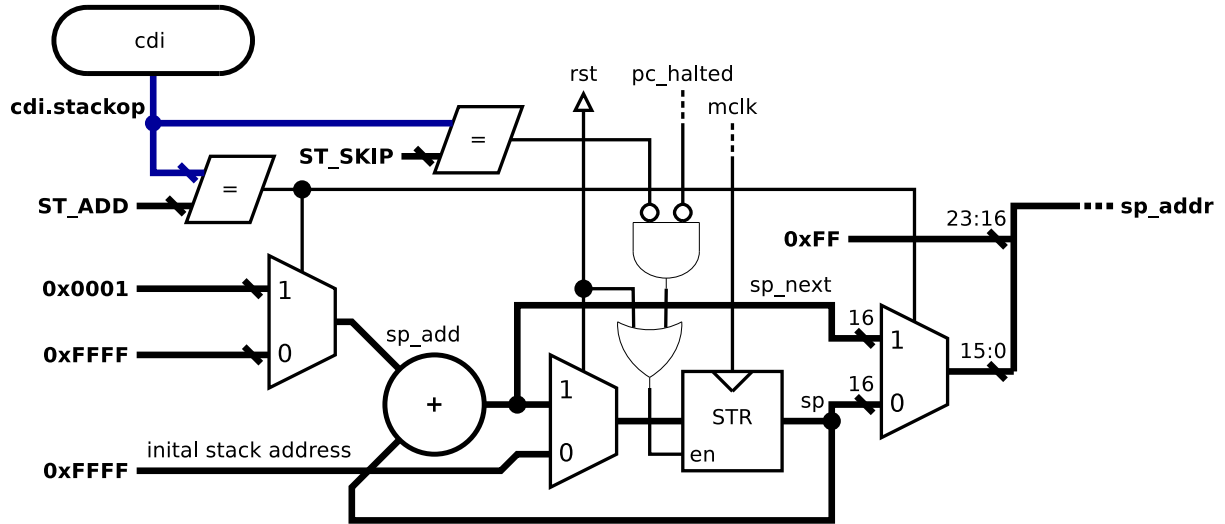


Figure 3.3.2: Digital diagram of RISC8 program counter

of Atkin" algorithm [4], however is it fairly complicated and time consuming especially when written in assembly.

4.1.2 Assembler/Compiler

In order to write more complicated code for benchmark, a proper compiler is required. Current assembler support definitions and labels, however not macros or imports from other files, nor linked libraries. Ideally, a common language compiler needs to be developed so that benchmark programs could be imported without need to completely rewrite them in assembly. However such compiler might take more time to develop than writing benchmarks in assembly. Therefore it needs to be decided which option to do.

4.2 Failure Assessment

This section describes likely possibilities of project failures:

As of current schedule OISC processor will be implemented in Term 2, however due to personal schedule project will be given about twice less time than in Term 1 which may result in not finishing OISC processor or developing all benchmarks for it on time. Mitigation for this is to closely follow schedule and adjust OISC design in such way as it would take less time to implement benchmark.

Another possibility may be FPGA failure which would delay testing and benchmarking processors.

4.3 Updated Safety Risk Assessment

There are no changes to Safety Risk Assessment.

5 Appendix A: Safety Risk Assessment

RiskNet report is appended at the end of this document.

6 Appendix B: Computer Code

Append any code you may need here. Reference it in the text as "Appendix B, code snippet #"; for example, "Find a sample of the code used for this experiment in Appendix B, code snippet 2".

7 References

References

- [1] Tanvir Ahmed et al. "Synthesizable-from-C Embedded Processor Based on MIPS-ISA and OISC". In: *2015 IEEE 13th International Conference on Embedded and Ubiquitous Computing* (2015). DOI: 10.1109/euc.2015.23.
- [2] E. Blem, J. Menon, and K. Sankaralingam. "Power struggles: Revisiting the RISC vs. CISC debate on contemporary ARM and x86 architectures". In: *2013 IEEE 19th International Symposium on High Performance Computer Architecture (HPCA)* (2013). DOI: 10.1109/hpca.2013.6522302.
- [3] T. Jamil. "RISC versus CISC". In: *IEEE Potentials* 14.3 (1995), pp. 13–16. DOI: 10.1109/45.464688.
- [4] François Morain. "Atkin's Test: News from the Front". In: *Lecture Notes in Computer Science* (1989), pp. 626–635. DOI: 10.1007/3-540-46885-4_59.
- [5] Minato Yokota, Kaoru Saso, and Yuko Hara-Azumi. "One-instruction set computer-based multicore processors for energy-efficient streaming data processing". In: *Proceedings of the 28th International Symposium on Rapid System Prototyping Shortening the Path from Specification to Prototype - RSP '17* (2017). DOI: 10.1145/3130265.3130318.